

2026

东营新营大金属制品有限责任公司
NEW YOUNG-STAR METAL CO.,LTD

东营海普金属制品有限公司
HAIPU MARINE EQUIPMENT CO.,LTD



Credibility is our fundamental

Our Company

Haipu Marine Equipment co.,ltd / New Young Star Metal Co.ltd is specialized in various ship deck machineries,marine engineering machineries and ship fittings.Our main products anchor windlass, winch and anchors have been passed the certifications of CCS, BV, DNV and many other authoritative classification societies. and exported to the United States,Australia, Canada,New Zealand, Brazil Indonesia Malaysia and many European countries all the year round.We are also able to manufacture products according to our clients' designs, samples, or sketches. We look forward to cooperating with you!


东营海普金属制品有限公司/东营新营大金属制品有限责任公司主要生产各种船舶甲板机械,海洋工程机械,以及船舶舾装件。我们自主研发的锚机,绞车以及船锚成功的通过了CCS, BV, DNV等多家权威船级社认证并常年出口到美国, 澳大利亚, 加拿大, 新西兰, 巴西, 印尼, 马来西亚, 以及欧洲的多个国家。我们也可以根据客户提供的图纸、样品或者草图定做各类不锈钢制品以及各种设备。



Contents

Vertical Windlass 立式锚机	2
Capstan Winch 绞盘	12
Horizontal Windlass 卧式锚机	16
Electric winch 电动绞车	24
Drum Winch 小型电动绞车	26
Line Launder 船用小型吊装机	40
Accessories 配件	41
Bait trap 鱼饵笼	44
Trim Tab systems 压浪器	45
Anchors 锚	48
Bow Rollers 锚支架	57
Anchor Connector 锚连接器	64
Chain Stopper 掣链器	65
Chain Guide 导链滚轮	68
Chain pipe 导链筒	70
Fairleads 导缆孔	73
Marine Fairleads 船用导缆钳	75
Chain 锚链	77
Dock Line 缆绳	81
Wire Rope 钢丝绳	84
Nylon Wheel 尼龙轮	85
Marine Bollard 国标带缆桩	86
Marine Hardware 船用五金	90
Shackles 索具	120
Products Selection Guide 产品选型	136

VERTICAL WINDLASS

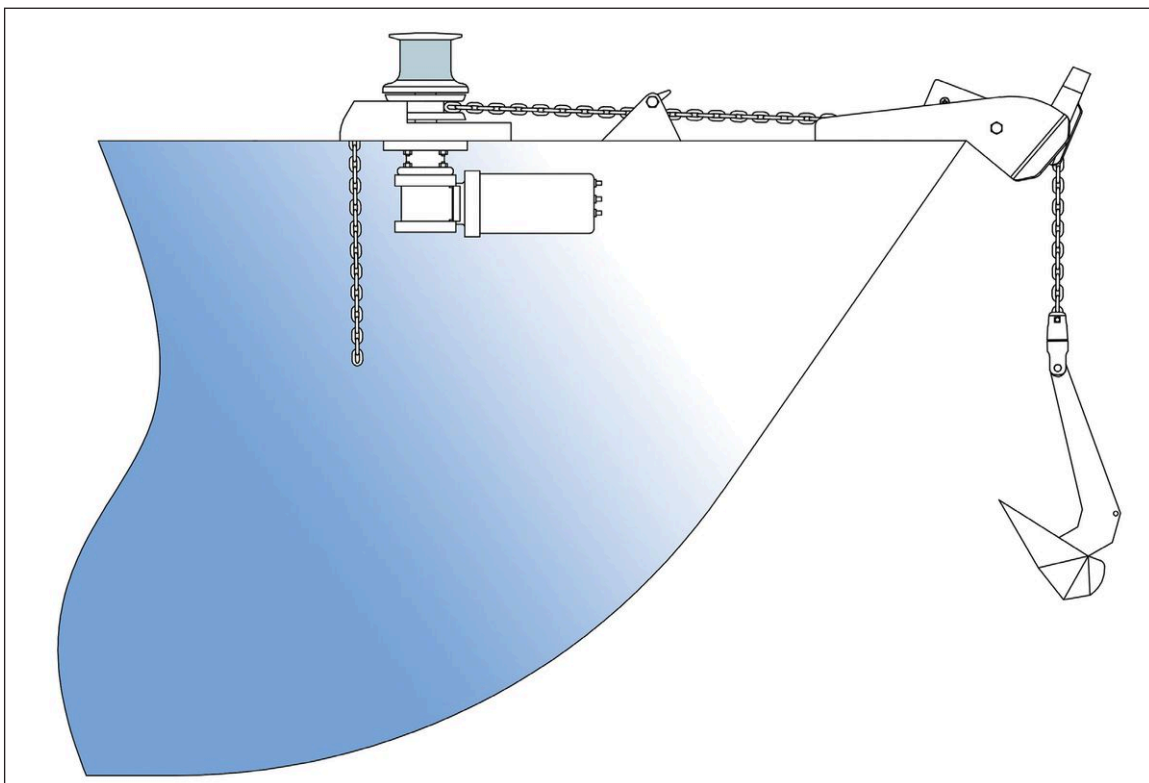


Features 特点

- Vertical design suits powerboats or sailboats and can be utilized for anchor ropes, as docking capstans on larger craft, or auxiliary line hauling.
- High-quality polished 316 stainless steel surface makes for a beautiful appearance
- Simplified installation by modular design and precise alignment of gearbox to the top works utilizing marine-grade stainless steel.
- Rope-chain gypsy
- Fit include hand-switch, foot-switch, control box and wrench
- 立式锚机配合锚绳可以适用于机动船和帆船，也可以当作绞车用在大的船舶上，也可以用来辅助搬运。
- 不锈钢 316 材质，高质量镜面抛光。
- 锚链轮可以使用锚绳和锚链，每种锚机都有两种规格可供选择。
- 配手动开关，脚踏开关，换向器，以及配套操作把手



型号 Model	YD411/YD411H	YD511/YD511H	YD611/YD611H	YD711/YD711H	YD811/YD811H	YD1011/YD1011H
电机 Motor	400W	600W	800W	1200W	1600W	2000W
电源供电 Power Supply	12V/24V	12V/24V	12V/24V	12V/24V	12V/24V	12V/24V
工作负载 Working Load	125 Kg	180 Kg	250 Kg	400 Kg	510 Kg	660Kg
最大拉力 Max. Pull	420 Kg	560 Kg	700 Kg	1200 Kg	1600 Kg	1900Kg
速度 Line speed	30m/ min	25m/min	20m/min	20m/min	20m/min	20m/min
工作电流 AMPS @Working load	30A/20A	60A/40A	100A/50A	120A/75A	165A/90A	170A/95A
净重 Net Weight	12/12.6Kg	12.3/12.6Kg	19/21Kg	24/25.5Kg	29/31.5Kg	30.5/33Kg
锚绳尺寸 Rope Size	14/16mm	14/16mm	18mm	18/20mm	18/20/26mm	20/26/28mm
锚链尺寸 Chain Size/ Gypsy	DIN766-6mm/7mm	DIN766-6mm/7mm	DIN766-8mm	DIN766-8mm/10mm	DIN766-8/10/12mm	DIN766-10/12/13mm

Dimension 尺寸图

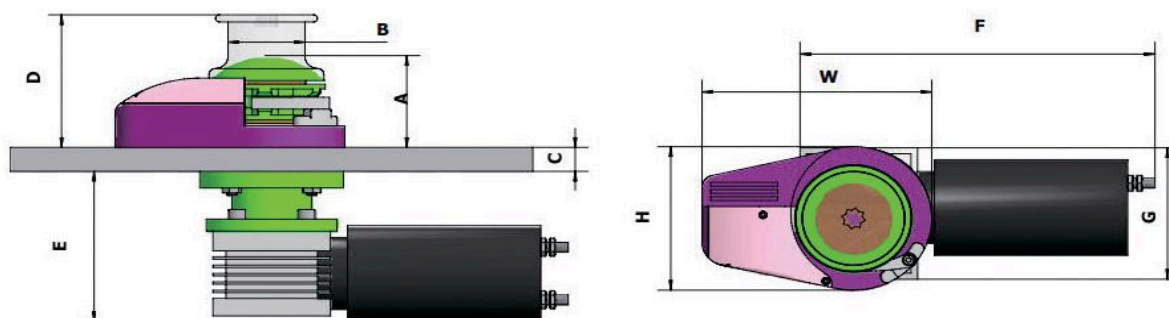

型号 Model	Motor(W)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	H(mm)	W(mm)
YD411	400	85	—	22-41	—	140	265	122	180
YD411H	400	—	59	22-41	115	135	265	122	181
YD511	600	85	—	22-41	—	140	275	122	180
YD511H	600	—	59	22-41	115	135	275	122	181
YD611	800	110	—	38-54	—	145	320	155	220
YD611H	800	—	79	38-54	165	145	320	155	220
YD711	1200	110	—	38-54	—	172	350	170	265
YD711H	1200	—	79	38-54	165	172	350	170	265
YD811	1600	110	—	38-54	—	190	415	170	265
YD811H	1600	—	79	38-54	165	190	415	170	265
YD1011	2000	130	—	38-54	—	190	415	195	295
YD1011H	2000	—	110	38-54	235	190	415	195	295


Options 可选配置：

- With capstan & without capstan 带绞缆筒和不带绞缆筒两种类型可供选择
- Different-length bolts for any deck thickness 根据安装甲板厚度不同配置不同长度的固定螺栓
- Full range of accessories including anchors, bow rollers, chain stoppers, chain & rope 多种其他配套配件供选择，包含船锚，锚支架，链卡，锚链和锚绳
- AC electric motor available 也可以配置交流电机

AC Vertical windlass 交流立式锚机

型号 Model	YD911-X1/ YD911H-X2	YD911-X2/ YD911H-X2	YD1011-X1/ YD1011H-X1	YD1011-X2/ YD1011H-X2
电机 Motor	1500W	2200W	1500W	2200W
电源供电 Power Supply	220V/380V	220V/380V	220V/380V	220V/380V
工作负载 working Load	272 Kg	425 Kg	290Kg	640Kg
最大拉力 Max. Pull	408 Kg	640 Kg	435 Kg	960Kg
速度 Line speed	20m/ min	20m/min	20m/min	20m/min
工作电流 AMPS@Working load	6A/9A	8A/13.6A	6A/9A	8A/13.6A
净重 Net Weight	31/33Kg	35/37Kg	31.7/34.7Kg	36.5/38.5Kg
锚绳尺寸 Rope Size	18/20mm	18/20mm	20/26/28mm	20/26/28mm
锚链尺寸 Chain Size/Gypsy	DIN766-8mm/10mm	DIN766-8mm/10mm	DIN766-10/12/13mm	DIN766-10/12/13mm

Dimension Diagram 尺寸图

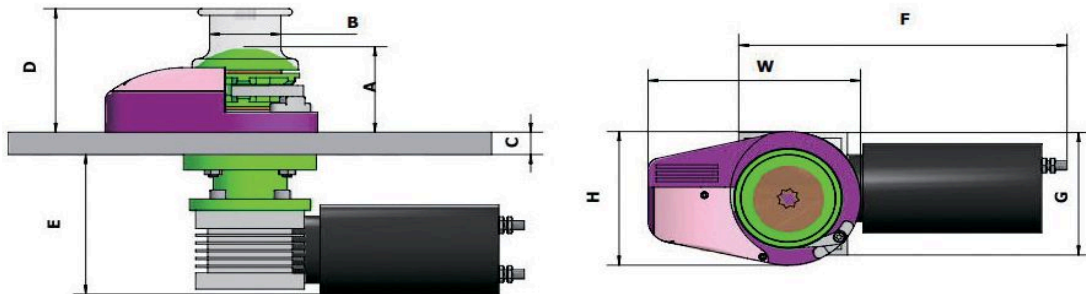


型号 Model	电机交流 Motor AC)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	H(mm)	W (mm)
YD911-X1	1500W	110	—	38-54	—	220	465	170	265
YD911H-X1	1500W	—	79	38-54	165	220	465	170	265
YD911-X2	2200W	110	—	38-54	—	220	485	170	265
YD911H-X2	2200W	—	79	38-54	165	220	485	170	265
YD1011-X1	1500W	130	—	38-54	—	225	465	195	295
YD1011H-X1	1500W	—	110	38-54	235	225	465	195	295
YD1011-X2	2200W	130	—	38-54	—	225	485	195	295
YD1011H-X2	2200W	—	110	38-54	235	225	485	195	295



型号 Model	YD201/ YD201H	YD202/ YD202H	YD203/ YD203H
电机 Motor	600W	900W	1200W
电源供电 Power Supply	12V/24V	12V/24V	12V/24V
工作负载 working Load	186Kg	270 Kg	400Kg
最大拉力 Max. Pull	560 Kg	740 Kg	1200 Kg
速度 Line speed	25m/ min	20m/min	20m/min
工作电流 AMPS@Working load	60A/40A	110A/55A	120A/75A
净重 Net Weight	11.5/12.2Kg	18.5/20.3Kg	22.8/24.5Kg
锚绳尺寸 Rope Size	14/16mm	18mm	20mm
锚链尺寸 Chain Size/Gypsy	DIN766-6mm/7mm	DIN766-8mm	DIN766-10mm

Dimension Diagram 尺寸图

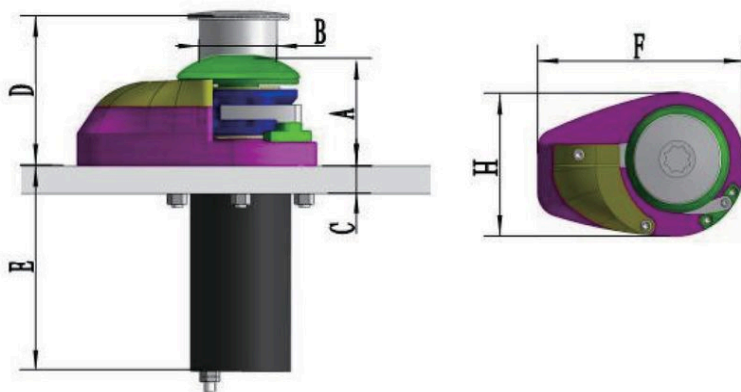

型号 Model	电机 Motor	A	B	C	D	E	W	H
YD201	600W	85		22-41		230	180	122
YD201H	600W		59	22-41	115	230	180	122
YD202	900W	110		38-54		250	220	155
YD202H	900W		79	38-54	165	250	220	155
YD203	1200W	110		38-54		340	265	170
YD203H	1200W		79	38-54	165	340	265	170

YDG Series 国标系列锚机

Features 特点

- High-quality polished 316 stainless steel surface makes for a beautiful appearance
- With different drives and recommended for boats up to 90M.
- Independent Gypsy and drum operation
- The YDG Series windlass can use chains up to 30mm with stud link in diameter.
- Possibility of 230,400V

- 不锈钢 316 材质，高质量镜面抛光。
- 多种型号可适用于长达 90 米的船。
- YDG 系列锚机适用国标 12.5-30mm 有挡锚链
- 电制 220V/380V

YDG series with Horizontally & Vertical Mounted
AC Electric Motor and Band Brake


The motor with electromagnetic brake, operation safer.

国标系列锚机，装配水平或者直立式电机以及手刹装置
电机带有电磁制动车，使得操作更有安全性。




型号 Model	电机 Motor	电源供应 Power Supply	电流 (工作负载) Amps @working load	最大拉力 Max. Pull(kg)	工作负载 Work load(kg)	速度 Speed (m/min)	锚链尺寸 Chain size (mm)Stud Link	净重 (参考) N.W(kg)
YDG-12.5	3KW	220V/380V	19.1 /4.9A	996	664	9.6	12.5	97
YDG-14	4KW	380V/3PH	6.2A	1250	833	10	14	116
YDG-16	4KW	380V/3PH	8.2A	1632	1088	10.6	16	161
YDG-17.5	4KW	380V/3PH	8.2A	1952	1301	9.5	17.5	185
YDG-19	5.5KW	380V/3PH	11A	2301	1534	9.4	19	255
YDG-20.5	7.5KW	380V/3PH	11A	2680	1786	9.6	20.5	306
YDG-22	7.5KW	380V/3PH	14.6A	3086	2057	10.7	22	
YDG-24	11KW	380V/3PH	21.6A	3672	2448	11.4	24	
YDG-26	11KW	380V/3PH	21.6A	4310	2873	11.2	26	
YDG-28	15KW	380V/3PH	28.9A	4998	3332	13.3	28	
YDG-30	15KW	380V/3PH	28.9A	5738	3825	11.5	30	

Dimension 尺寸图

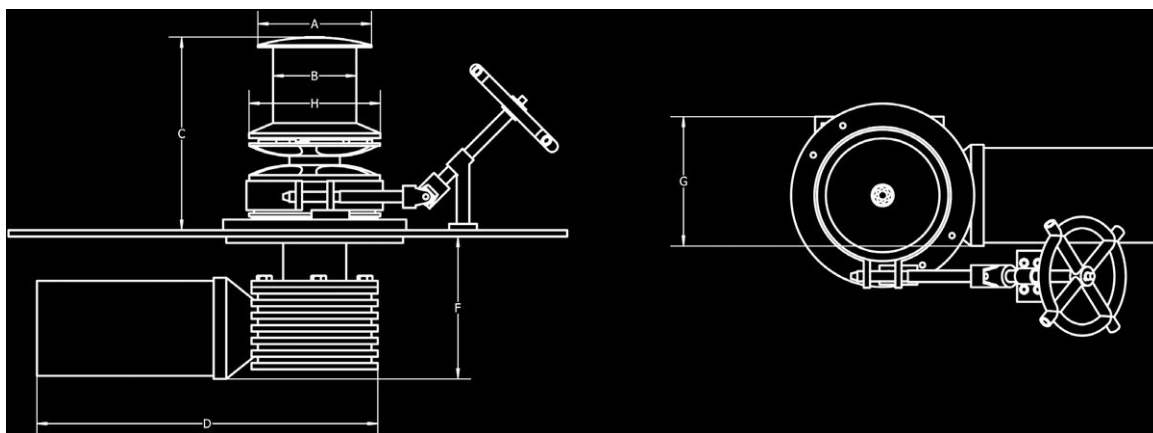

型号 Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	H(mm)
YDG-12.5	290	132	310	500	216	180	210
YDG-14	305	137	330	530	273	275	240
YDG-16	350	145	375	530	295	290	270
YDG-17.5	402	160	425	550	320	310	293
YDG-19	450	185	450	600	320	330	320
YDG-20.5	500	202	495	600	360	350	350
YDG-22	530	250	580	780	440	530	366
YDG-24	560	250	635	970	480	610	399
YDG-26	600	303	661	970	500	610	433
YDG-28	650	325	690	1050	520	710	466
YDG-30	700	330	820	1050	620	710	500

Dimension 尺寸图

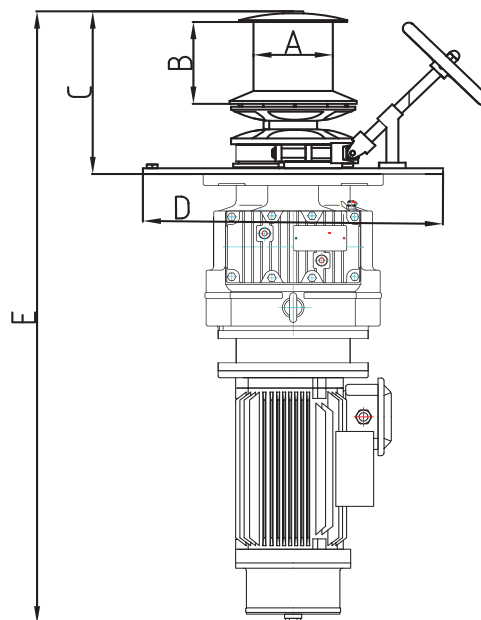

型号 MODEL	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDG-12.5	132	143	283	560	1065
YDG-14	138	154	333	560	1192
YDG-16	156	160	363	690	1155
YDG-17.5	166	170	408	720	1200
YDG-19	185	197	454	720	1230
YDG-20.5	202	219	490	750	1260
YDG-22	250	226	538	1000	1390
YDG-24	250	236	551	1000	1410
YDG-26	303	256	585	1100	1620
YDG-28	325	306	660	1100	1700
YDG-30	330	328	720	1100	1800

Hydraulic Windlass 国标系列液压锚机

Features 特点

- High-quality polished 316 stainless steel surface makes for a beautiful appearance
 - With different drives and recommended for boats up to 90M.
 - Independent Gypsy and drum operation
 - The YD(H) Series windlass can use chains up to 20.5mm with stud link in diameter.
 - Optional accessories: on-off valve, pressure relief valve, flow control valve, foot switch
- 不锈钢 316 材质，高质量镜面抛光。
 - 多种型号可适用于长达 90 米的船。
 - YDG 系列锚机适用国标 12.5~20.5mm 有挡锚链
 - 配件选择：开关阀，泄压阀，控流阀，脚踏开关



型号 MODEL	YDG(H)-12.5	YDG(H)-14	YDG(H)-16	YDG(H)-17.5	YDG(H)-19	YDG(H)-20.5
最大拉力 Max. Pull(kg)	1100kg	1330kg	1660kg	2100kg	3300kg	2900kg
工作负载 Working load(kg)	664kg	833kg	1088kg	1301kg	1534kg	1786kg
速度 Speed(m/min)	12.5	11.3	12.9	12.61	13.68	13.2
最大压力 Max. Pressure	25Mpa	25Mpa	25Mpa	25Mpa	25Mpa	25Mpa
理论排量 Hydraulic Flow	485ml/r	791ml/r	1022ml/r	1184ml/r	1634ml/r	1761ml/r
锚链尺寸 Chain Size(mm)	AM2-12.5	AM2-14	AM2-16	AM2-17.5	AM2-19	AM2-20.5
重量 (参考) Net Weight(kg)	126	140	205	270	308	420

Optional Accessories

可选配件


Manual proportional flow directional
block valve
船用手动比例流量方向复合阀



Hydraulic Capstan



Dimension 尺寸图

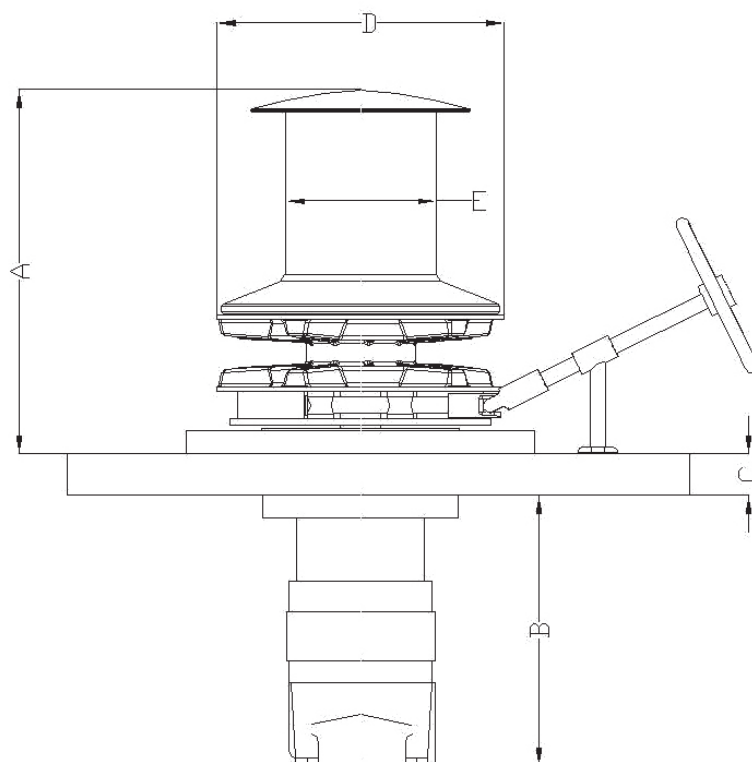


型号 MODEL	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	H(mm)
YDG(H)-12.5	290	132	310	380	216	500	210
YDG(H)-14	305	137	330	380	273	500	240
YDG(H)-16	350	145	375	410	295	530	270
YDG(H)-17.5	402	160	425	495	320	600	293
YDG(H)-19	450	185	450	495	320	600	320
YDG(H)-20.5	500	202	495	510	360	720	350

Capstan Winch 绞盘

- Designed for simple, low cost anchor recovery on smaller boats and rope hauling on larger vessels
- line hauling from any direction
- Simplified through deck installation by modular design and precise alignment of gearbox to the top works utilising stainless steel bolts
- Compact, reliable gearbox, made of orrosion resistant material
- Heavy duty ,dual direction motors, designed for marine winches
- Easily disassembled for servicing
- Fit include hand-switch, foot-switch, control box and wrench
- 设计简单，成本较小，适合小船使用，也可以用在稍微大一些船上拖拽绳索。
- 可以多个方向拖拽绳子。
- 甲板安装过程简单，紧固螺栓材质符合船用不锈钢标准。
- 减速箱设计简洁可靠，由防锈材料制造。
- 电机质量可靠，专为船用绞盘设计。
- 拆装简单，便于维修和维护。
- 配套手动开关，脚踏开关，换向器和把手。



型号 Model	净重 Net Weight	电源供应 Power Supply	电机 Motor (W)	工作电流 Current absorption	工作负载 Working Load(kg)	最大拉力 Max.Pull(kg)	速度 Line Speed
YDVC-001	9.2kg	12V /24V	600	60A/40A	190	400	25m/min
YDVC-002	14kg	12V /24V	1000	115A/60A	350	680	25m/min
YDVC-005	21kg	12V /24V	1600	165A/90A	520	1230	20m/min
YDVC-006	32kg	380V/220V	2000	12A	680	1760	20m/min
YDVC-007	48kg	380V/220V	3000	20A	890	2130	20m/min

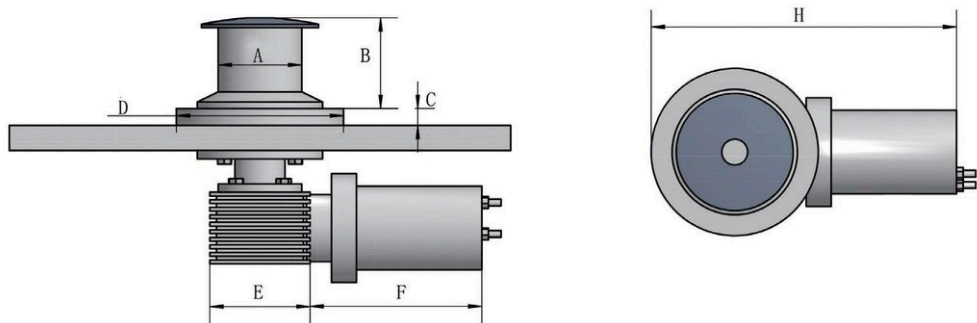

型号 Model	A	B	C	D	E	F	H
YDVC001	60	65	15-40	110	100	155	270
YDVC002	80	90	20-50	150	140	165	330
YDVC005	110	130	20-50	150	140	190	360
YDVC006	130	160	20-50	170	160	260	480
YDVC007	160	190	20-50	200	180	320	560



Capstan Winch 绞盘

Features 特点

- Designed for traditional rope and chain combination anchor rodes
- line hauling from any direction
- Simplified through deck installation by modular design and precise alignment of gearbox to the top works utilising SS bolts
- Compact, reliable gearbox, made of corrosion resistant material
- Heavy duty, dual direction motors, designed for marine winches
- Easily disassembled for servicing
- Fit include hand-switch, foot-switch, control box and wrench
- 该系列绞盘可以配套锚绳和锚链，也可以锚绳和锚链编接在一起同时使用
- 绳子可以多个方向拖拽
- 甲板安装过程十分简单，紧固螺栓材质符合船用不锈钢标准。
- 减速箱由防锈材料制造。
- 电机质量可靠，专为船用绞盘设计。
- 拆装简单，便于维修和维护。
- 配套手动开关，脚踏开关，换向器，和把手。



型号 Model	净重 Net Weight	电源供应 Power Supply	电机 motor	工作电流 Current absorption	工作负载 working load	最大拉力 Max. Pull	速度 Speed	锚绳尺寸 Rope Size	锚链尺寸 Chain Size/Gypsy
YDVC-003	7kg	12V/24V	400W	30A/20A	125kg	420kg	30m/min	16mm	DIN766-6/7mm
YDVC-004	9kg	12V /24V	600W	60A/40A	186kg	560kg	25m/min	16mm	DIN766-6/7mm

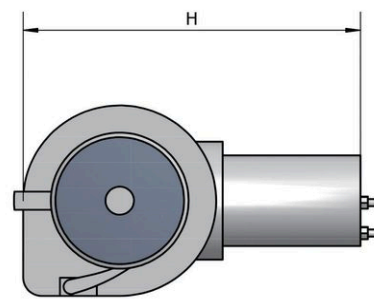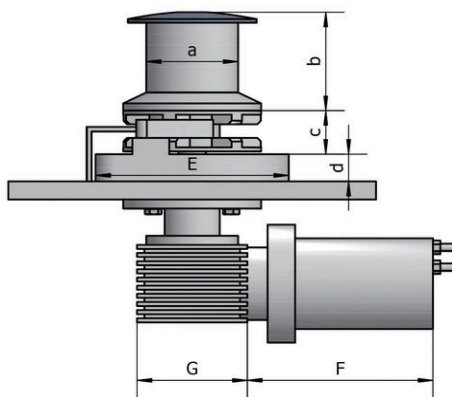

型号 Model	A	B	C	D	G	F	H
YDVC-003	59mm	60mm	20~40mm	16mm	100mm	155mm	265mm
YDVC-004	59mm	60mm	20~40mm	16mm	100mm	155mm	275mm

Capstan 绞盘




Features 特点

- Polished stainless steel finish
- Fluted Capstan for line grip Reversible motor
- Easily disassembled for servicing: disassemble from top and bottom
- Large capstan drums for increased line hold
- The gearbox is driven by a vertically mounted below deck
- Fit include hand-switch, foot-switch, control box and wrench
- 不锈钢镜面抛光
- 带凹槽的绞缆筒，便于抓牢绳子
- 电机可正反转
- 绞盘上下两部分是可分开的，便于组装和拆卸检修
- 加大绞缆筒可以容纳更多绳子
- 减速箱立式安装在甲板以下
- 配套手动开关，脚踏开关，换向器和把手

型号 Model	净重 Net.Weight	电源供应 Power Supply	电机 Motor(W)	工作电流 Current absorption	工作负载 Working Load(kg)	最大拉力 Max.Pull(kg)	速度 Line Speed
Capstan-001	7kg	12V /24V	600W	60A/40A	160kg	320kg	22m/min
Capstan-002	11kg	12V / 24V	800W	100A/50A	200kg	380kg	22m/min
Capstan-003	14kg	12V /24V	1200W	120A/75A	260kg	420kg	20m/min
Capstan-004	18kg	12V/24V	1600W	165A/90A	340kg	900kg	20m/min

型号 Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	H(mm)	G(mm)
Capstan-001	89	128	59	10.5	22-41	92	197	59
Capstan-002	132	138	92	15	33-50	92	210	78
Capstan-003	132	138	92	15	33-50	114	240	78
Capstan-004	148	148	114	15	33-50	114	322	100

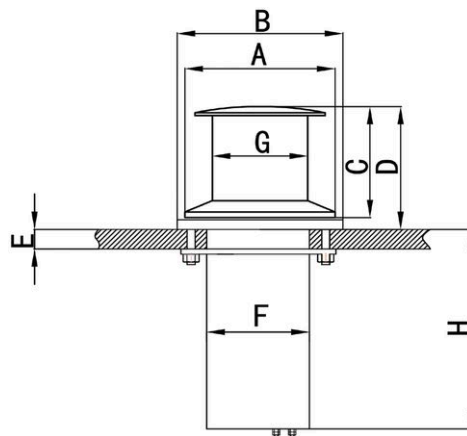


Capstan 绞盘

Features 特点

- Polished stainless steel finished
- Fluted capstan for line grip
- Motors work very well with good pull
- Mooring a vessel will be simple by using stern handling capstans
- A range of capstans and power size are available
- 绞缆筒不锈钢镜面抛光
- 绞缆筒表面凹槽设计，便于抓牢绳索
- 大拉力电机
- 使用该绞盘，系泊过程更加轻松简单
- 多种尺寸型号可以选择（绞缆筒和电机）



型号 Model	净重 Net Weight	型号 Power Supply	电机 Motor	工作电流 Current absorption	工作负载 working load	最大拉力 Max. Pull	速度 Speed
Capstan-005	48kg	380V,3PH/50HZ	2.2KW	6A	320kg	710kg	25m/min
Capstan-006	74kg	380V ,3PH/50HZ	3KW	6.8A	480kg	990kg	20m/min
Capstan-007	92kg	380V,3PH/50HZ	4KW	8.2A	690kg	1560kg	20m/min
Capstan-008	146kg	380V ,3PH/50HZ	5KW	11A	1010kg	2340kg	20m/min

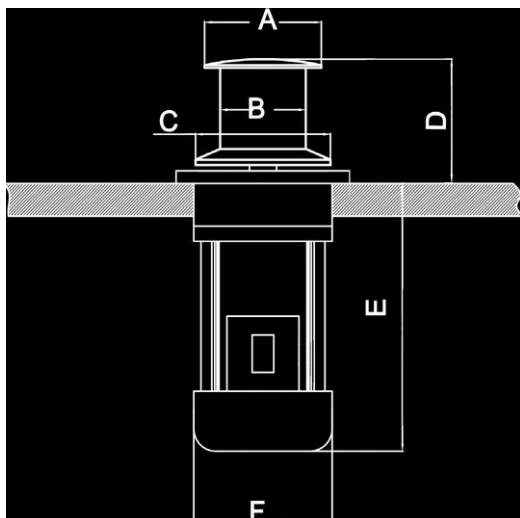

Dimension 尺寸图

型号 Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Capstan-005	180	132	210	180	720	240
Capstan-006	200	145	240	210	810	250
Capstan-007	220	160	280	260	920	280
Capstan-008	250	180	320	300	1010	280


YH Series Horizontal Windlass YH 系列卧式锚机



Features 特点

- All the parts above the deck is 316 L stainless steel, fully waterproof and rustproof.
- Manual free- fall system
- Simple deck mounted installation with no under deck parts
- Fit include hand switch, foot switch, solenoid and handle
- 所有外置的部件都是 316L 不锈钢材质，防水防锈
- 带离合装置，可以快速放锚
- 安装简单，没有需要安装在甲板以下的部分
- 配手动开关，脚踏开关，换向器，把手

型号 Model	净重 Net.Weight	电源供应 Power Supply	电机 Motor (W)	工作电流 AMPS@Working Load	工作负载 Working Load(kg)	最大拉力 Max. Pull(kg)	速度 Line Speed	锚绳尺寸 Rope Size	锚链尺寸 Chain Size/ Gypsy
YH600	13Kg	12V/24V	600W	60A/40A	186Kg	560Kg	25m/min	14/16mm	DIN766 -6/7mm
YH900	13.5Kg	12V/24V	900W	110A/55A	270Kg	740Kg	20m/min	18mm	DIN766-8mm

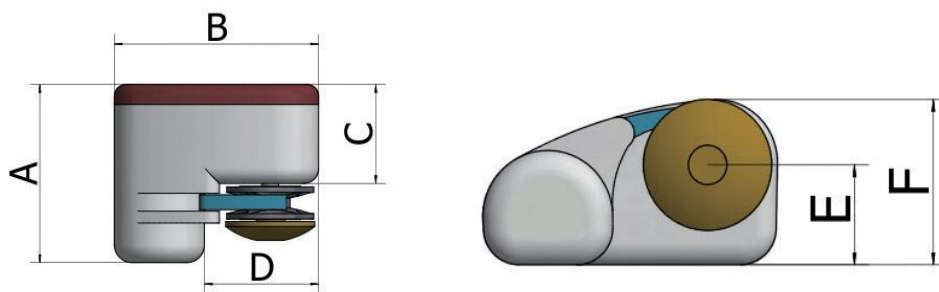

型号 Model	电机 Motor	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
YH600	600W	185	265	110	130	90	155
YH900	900W	290	320	180	195	235	280

Horizontal Windlass 卧式锚机



SH600& SH1000

Features 特点

- All the parts above the deck is 316 L stainless steel, fully waterproof and rustproof.
- Manual free- fall system
- Easy and speed installation, vertical motor allowing installation above the deck
- 所有外置的部件都是 316L 不锈钢材质，防水防锈
- 带离合装置，可以快速放锚
- 直立式电机，可以在甲板上直接打孔安装锚，简单快速



型号 Model	净重 Net.Weight	电源供应 Power Supply	电机 Motor(W)	工作电流 AMPS @Working Load	工作负载 Working Load(kg)	最大拉力 Max.Pull(kg)	速度 Line Speed	锚绳尺寸 Rope Size	锚链尺寸 Chain Size/ Gypsy
SH600	15kg	12V/24V	600W	60A/40A	210kg	600kg	22m/min	14/16mm	DIN766 - 6/7mm
SH1000	25kg	12V/24V	1000W	115A/60A	350kg	750g	20m/min	18mm	DIN766- 8MM

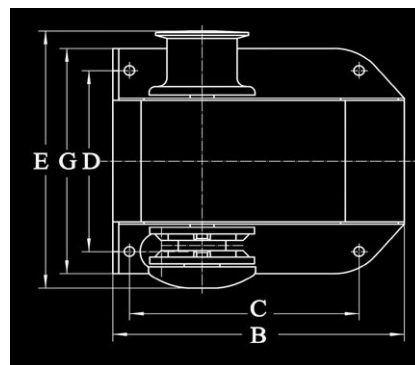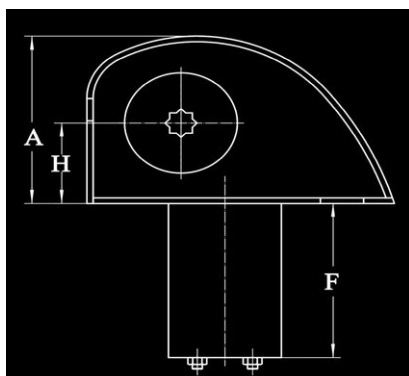

Dimension 尺寸图

型号 Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)
SH600	150	245	193	164	260	138	204	72
SH1000	204	324	245	190	304	150	232	105

Horizontal Windlass YDH 卧式锚机

Features 特点

- Twin capstan, single gypsy, but you also can choose twin gypsy
- Reversible motor
- Independent operation of capstans and gypsy by declutching the drive
- Simple deck mounted installation with no under deck parts
- Simplified maintenance with ability to strip the running gear (chain-wheel and drum) from the windlass without disturbing the windlass mounting
- Totally sealed gearbox with ground worm drive
- Horizontal windlass casing are cast marine grade aluminium alloy with white epoxy enamel finish
- Fit include hand-switch, control box and wrench
- 双绞缆，单链轮，但是您也可以根据自己需要选择安装双链轮
- 电机可正反转
- 当合上离合器装置时，锚链轮和绞缆筒可以分开工作
- 安装简单，不需要安装在夹板以下的部分
- 需要检修或者保养时，不需要把锚机从夹板上拆下，只需要把锚链轮和绞缆筒拆下来就可以了。
- 全封闭蜗轮蜗杆式减速箱
- 卧式锚机外壳是船用铸铝一体成型，白色环氧树脂喷塑
- 配手动开关，脚踏开关，换向器，把手



Specification 规格型号


型号 Model	YDH-011	YDH-012	YDH-013	YDH-014	YDH-015	YDH-016
电机 Motor	600W	1000W	1400W	1600W	2000W	3000W
电源供电 Power Supply	12V/24V	12V/24V	12V/24V	12V/24V	24V/380V/220V	380V/220V
工作负载 Working Load	190 Kg	350Kg	520Kg	660Kg	900Kg	1200Kg
最大拉力 Max. Pull	600Kg	750Kg	1100 Kg	1400 Kg	2000Kg	2500Kg
速度 Line speed	25m/ min	25m/min	25m/min	20m/min	20m/min	20m/min
工作电流 AMPS@Working load	60A/40A	115A/60A	140A/75A	165A/90A	6A/9A	8A/13.6A
净重 Net Weight	14Kg	23Kg	33Kg	36Kg	60Kg	70Kg
锚绳尺寸 Rope Size	14/16mm	18/20mm	18mm	18/20mm	18/20/26mm	20/26/28mm
锚链尺寸 Chain Size/Gypsy	DIN766-6mm/7mm	DIN766-8mm/10mm	DIN766-8mm/10mm	DIN766-10/12mm	DIN766-10/12/13mm	DIN766-10/12/13mm

Optional Accessories

可选配件



Dimension 尺寸图

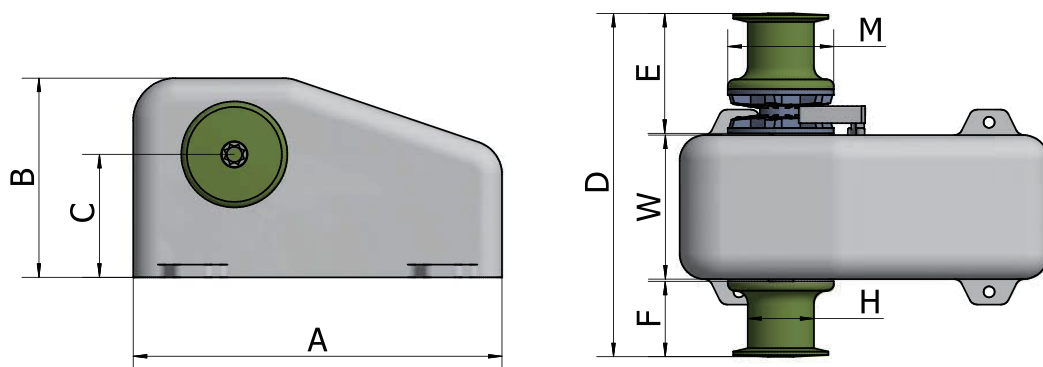


型号 Model	电机 Motor	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	H(mm)	M(mm)	W(mm)
YDH-011	600W	310	170	105	295	98	63	59	89	120
YDH-012	1000W	410	215	125	380	145	95	79	132	130
YDH-013	1400W	435	235	145	430	155	95	79	132	170
YDH-014	1600W	435	235	145	430	155	95	79	132	170
YDH-015	2000W	590	310	200	560	178	120	100	145	255
YDH-016	3000W	590	310	200	560	178	120	100	145	255

多种组合形式可以选择


1. 双链轮
2. 单链轮 + 单绞缆筒
3. 单绞缆筒
4. 双绞缆筒
5. 其他组合样式

Several combination options:

1. Double Gypsy
2. single Gypsy and single capstan
3. single capstan
4. Double capstan
5. Other types

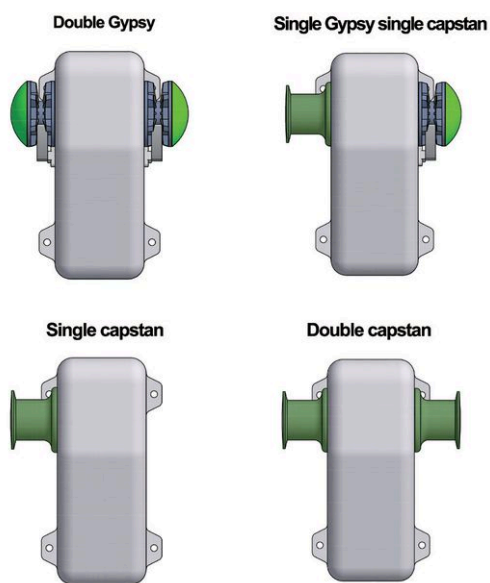

Horizontal Windlass GB Series 卧式锚机

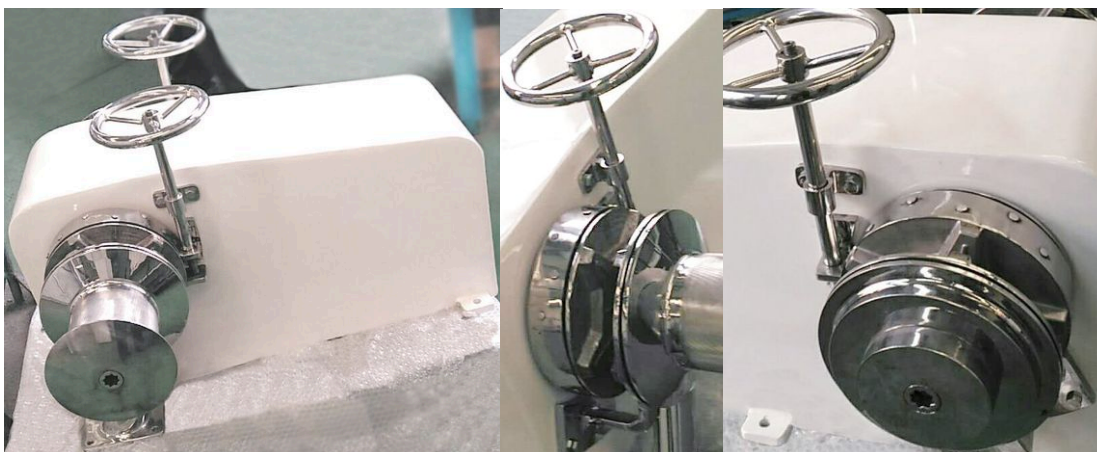


- Twin capstan, single gypsy, but you also can choose twin gypsy
- Reversible motor
- Independent operation of capsatans and gypsy by declutching the drive
- Simple deck mounted installation with no under deck parts
- Simplified maintenance with ability to strip the running gear (chain-wheel and drum) from the windlass without disturbing the windlass mounting
- Totally sealed gearbox with ground worm drive
- Horizontal windlass casing are cast marine grade aluminium alloy with white epoxy enamel finish
- Fit include hand-switch, control box and wrench
- 双绞缆, 单链轮, 但是您也可以根据自己需要选择安装双链轮
- 电机可正反转
- 当合上离合器装置时, 锚链轮和绞缆筒可以分开工作
- 安装简单, 没有需要安装在夹板以下的部分
- 需要检修或者保养时, 不需要把锚机从夹板上拆下, 只需要把锚链轮和绞缆筒拆下来就可以了
- 全封闭蜗轮蜗杆式减速箱
- 卧式锚机外壳是船用铸铝一体成型, 白色环氧树脂喷塑
- 配手动开关, 脚踏开关, 换向器, 把手

Specification 规格型号

型号 Model	HP12.5	HP14	HP16	HP17.5	HP19	HP20.5
电机 Motor	3 /2.2KW	3.5KW	4KW	4KW	5.5KW	7.5KW
电源供电 Power Supply	220V/380V	380V/3PH	380V/3PH	380V/3PH	380V/3PH	380V/3PH
工作负载 working Load(kg)	664	833	1088	1301	1534	1786
最大拉力 Max. Pull	996	1250	1632	1952	2301	2680
速度 Line speed	10	10	10.6	10.2	10.2	10.4
工作电流 AMPS@Working load	19.1/4.9	6.2A	8.2A	8.2A	11A	14.6A
参考净重 Net Weight (kg)	205	260	320	410	490	530
锚链尺寸 Chain Size/Gypsy(mm)	Stud Link-12.5mm	Stud Link-14mm	Stud Link-16mm	Stud Link-17.5mm	Stud Link-19mm	Stud Link-20.5mm

Dimension 尺寸图

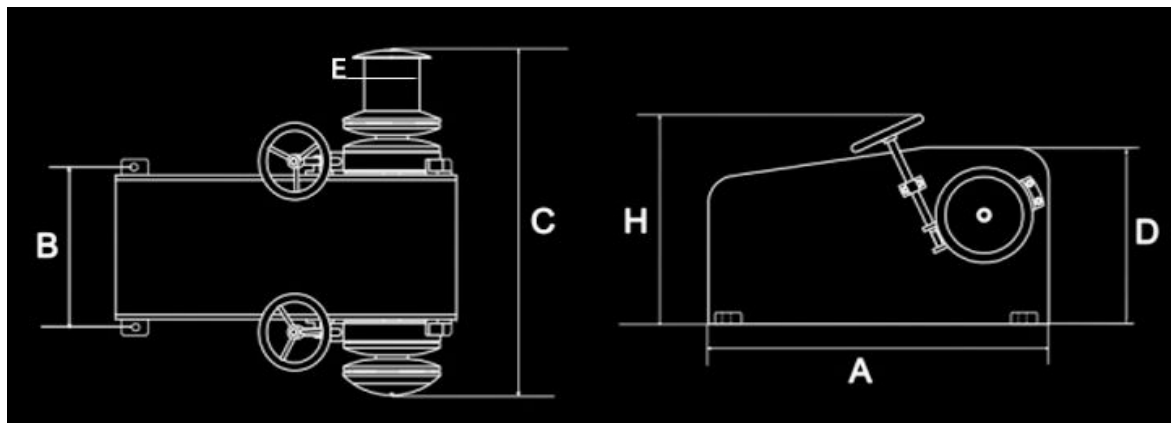

型号 MODEL	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	H(mm)
HP12.5	850	420	840	460	132	450
HP14	850	428	870	460	137	450
HP16	880	450	930	500	145	490
HP17.5	900	480	1010	550	160	580
HP19	990	510	1100	560	185	630
HP20.5	1050	510	1240	680	202	740

电制有 220V/380V 可以选择，电机也可以选择单速或者双速配置
多种组合形式可以选择

1. 单链轮 + 单绞缆筒
2. 单链轮 + 双绞缆筒
3. 双链轮 + 单绞缆筒
4. 双链轮 + 双绞缆筒

AC 380v or 220v motor drive, double speed motor also available

Several combination options:

1. Single Gypsy single capstan
2. single Gypsy twin capstan
3. Twin Gypsy single capstan
4. Twin Gypsy twin capstan




Horizontal Capstan 卧式绞盘

Features 特点

- Single capstan
- Reversible motor
- Simple deck mounted installation with no under deck parts
- Simplified maintenance with ability to strip the running gear (chain-wheel and drum) from the windlass without disturbing the windlass mounting
- Totally sealed motor and gearbox
- Marine grade aluminium alloy with white epoxy paint finish housing and capstan
- Fit include hand-switch, control box and wrench
- 单绞缆筒
- 电机可以正反转
- 安装简单，没有需要安装在甲板以下的部分
- 需要保养时，不需要把绞盘从甲板上拆下，只需要把绞缆筒拆下就可以
- 电机以及减速机全封闭
- 绞盘外壳和绞盘头全部铸铝材料制作，一体成型，水密，壳体表面白色环氧树脂漆
- 配件手动开关，脚踏开关，换向器，也可以配遥控器



型号 Model	净重 N.W.	电源供电 Power Supply	电机 Motor	工作电流 AMPS@ Working load	工作负载 working Load	最大拉力 Max. Pull	速度 Speed	锚绳尺寸 Rope Size
YDG-311	12Kg	12V/24V	600W	60A/40A	175Kg	420Kg	16-20m/min	12-16mm
YDG-411	23Kg	12V/24V	1200W	120A/75A	400Kg	860Kg	18-22m/min	16-20mm

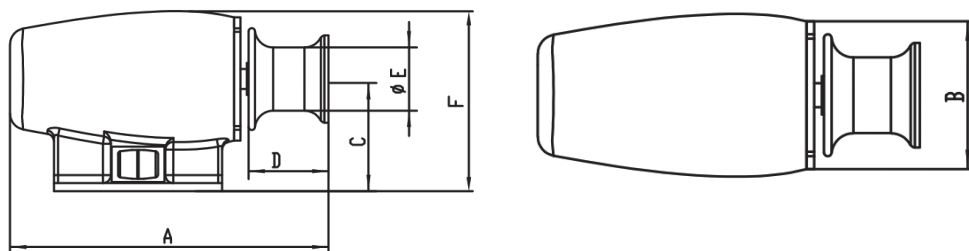

型号 Model	电机 Motor	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDG-311	600W	390	170	140	100	79
YDG-411	1200W	495	180	160	125	94.5

Horizontal electric combined Windlass 卧式组合锚机

Equipped with both clutch and band brake to allow independent operation of gypsy and drum.



High strength drive shaft, gypsy and warping drum are stainless steel

This type has a gypsy for chains 12.5,14,16,17.5,19,20.5,22,24,26,28,30mm stud-link

此型号组合式锚机配置双离合，双刹车，绞缆筒和锚链轮可以分开独立操作

高强度主轴，锚链轮和绞缆筒为不锈钢材质

有多个型号可供选择，适用链规格为有挡锚链 12.5,14,16,17.5,19,20.5,22,24,26,28,30mm

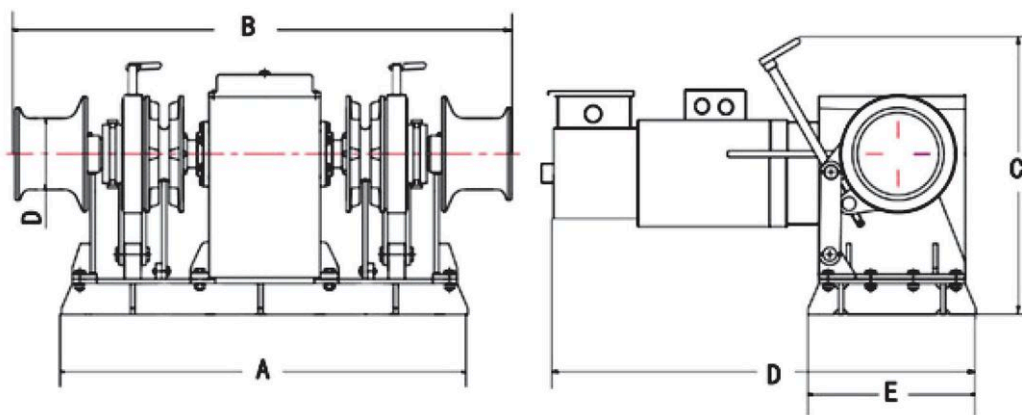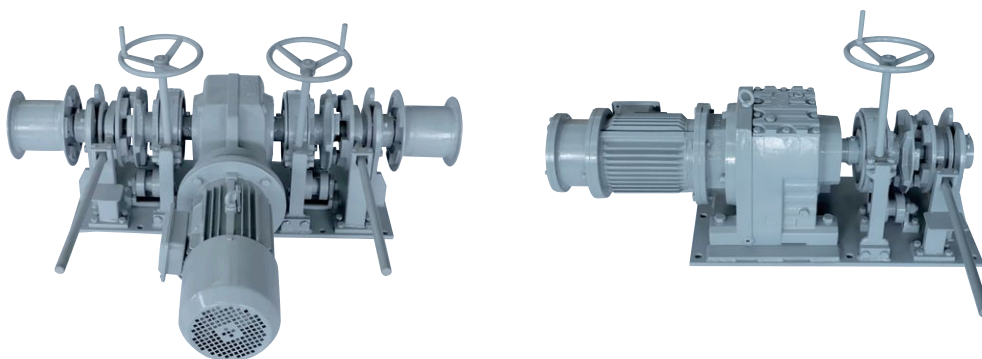

型号 Model	电制 Power Supply	工作负载 (KN) Working Load	最大拉力 (KN) Max Pull	速度 Speed	锚链尺寸 Chain Size	尺寸 (A*B*C*D) mm Dimension(A*B*C*D)
HC1816	380V,3PH/50HZ	6.6/8.3/10.9/13	9/12.5/16.3/19.5	>9m/min	12.5/14/16/17.5	1450*1800*1150*2100
HC1822	380V,3PH/50HZ	15.3/17.9/20.6/24.5	23/26.8/30.8/36.7	>9m/min	19/20.5/22/24	1750*2000*1300*2400

Electric Winch 电动绞车

Material: 316 stainless steel/ Carbon Steel 材质：316 不锈钢 / 碳素钢




本系列绞车可带排缆器，离合器，压绳机构，防脱绳报警装置，客户可以根据实际情况选择。

This type winch can be equipped with rope -guider, Clutch, rope roller, alarm system for the last winding ropes.



容绳量为绞车的理论值，用户应该根据考虑至少保留 3 圈钢丝绳的空间，防止绳头脱出。

please left at least 3 wraps ropes space of the drum, to prevent the ropes coming off.

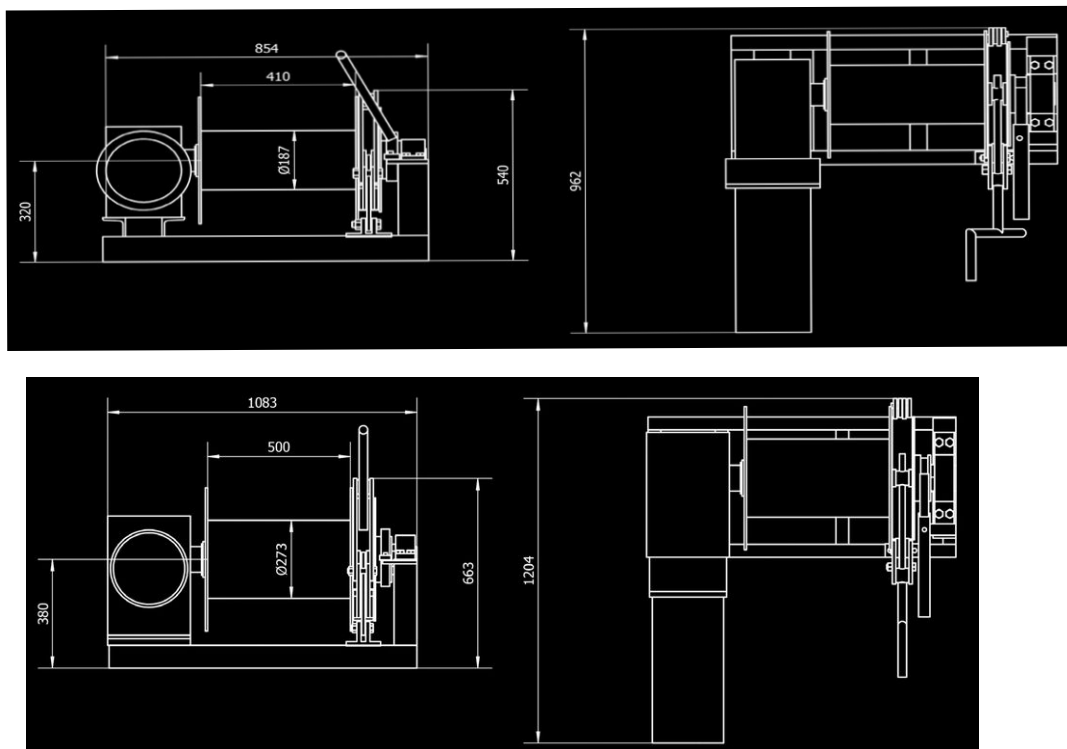


Electric Winch 电动绞车

Customized Winch for fish farm platform
振华重工海上养殖平台“振渔1号”定做绞车

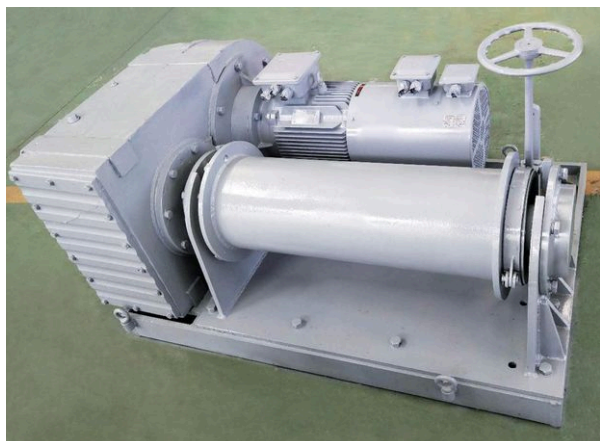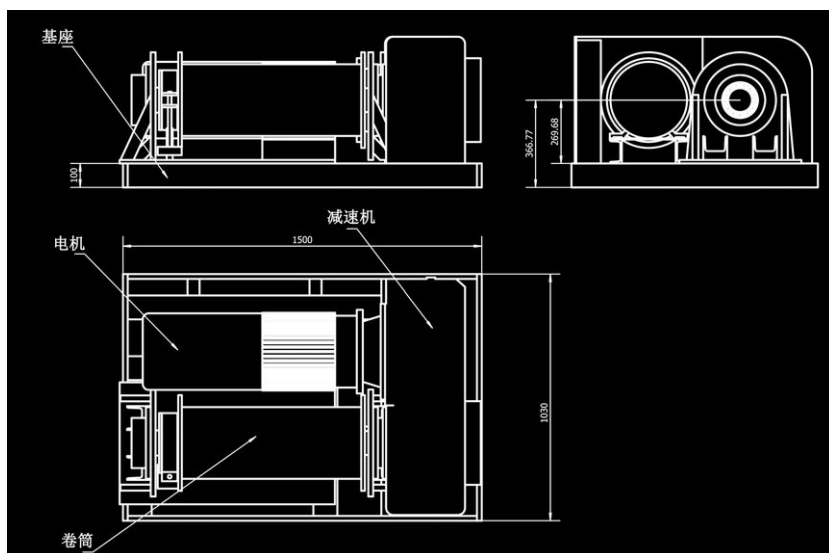


我们根据客户的要求定做各种绞车，根据客户需求设计独一无二的解决方案。
NYS is flexible to modify design according to customer needs or produce an unique solution.

小型不锈钢电动绞车 Stainless Steel Electric Winch

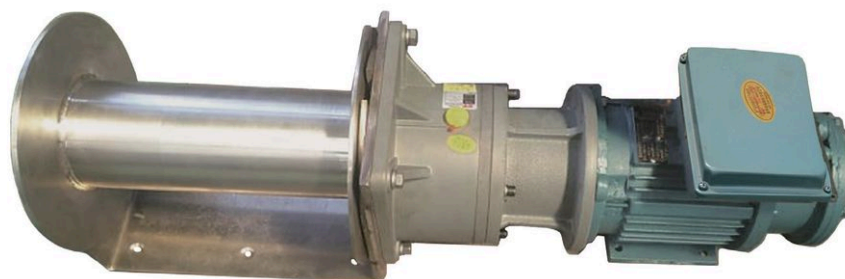

我们根据客户的要求定做各种绞车，根据客户需求设计独一无二的解决方案。

NYS is flexible to modify design according to customer needs or produce an unique solution.

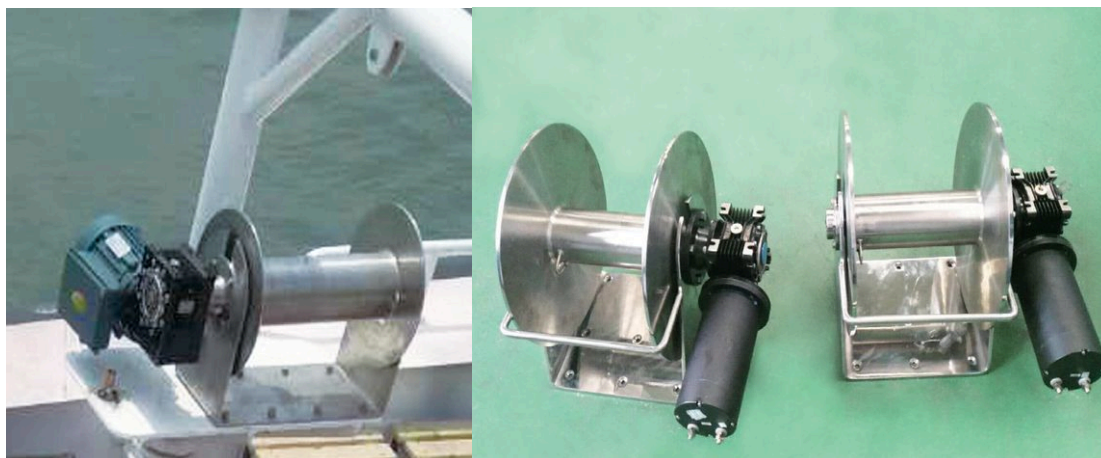

- DC 12V/24V electric motor drive.
- AC electric motor drive.
- Stainless steel 316 warping drum
- 直流 12V 或者 24V 电机驱动
- 交流电机驱动
- 316 不锈钢卷筒

HM Capstan 绞盘




Features 特点

- The HM Capstan is equipped with epicyclical gearbox, higher efficiency.
- All the outside parts of the capstan is stainless steel, fully waterproof and rustproof
- 该型号的绞盘配置的是行星轮减速机，所以更高效
- 所有外置的部件都是不锈钢材质，防水防锈

Specification 规格型号

型号 Model	净重 Net.Weight	电源供应 Power Supply	电机 Motor (W)	工作电流 AMPS@Working Load	工作负载 Working Load(kg)	最大拉力 Max.Pull(kg)	速度 Line Speed	锚绳尺寸 Rope Size
HM600	10kg	12V/24V	600W	60A/40A	90kg	180kg	16m/min	6-10mm
HM1000	14kg	12V/24V	1000W	115A/60A	100kg	230g	20m/min	8-10mm

Dimension 尺寸图


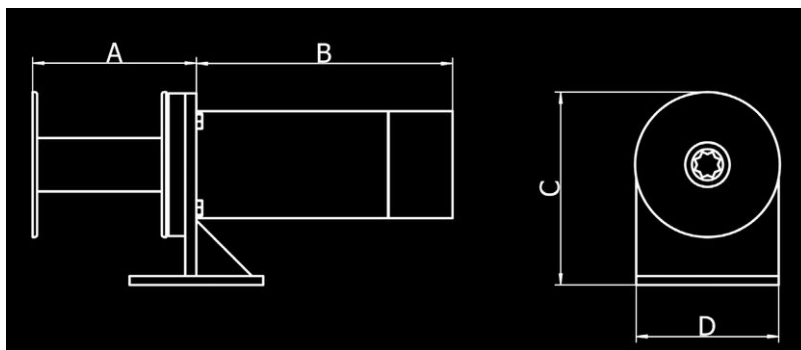


型号 MODEL	A(mm)	B(mm)	C(mm)	D(mm)
HM600	147	230	173	128
HM1000	210	270	210	128

Drum Winch 电动绞车

- Perfect Anchoring System for Fishing Boat
- Heavy Duty Motor, High speed, Silent Operation With Bearing
- Constructed from 316 marine grade stainless steel
- Simply drive the boat to where you want to fish, push a button and the anchor is I
- You can lower and retrieve your anchor rope using our winches at a rate between
- The NYS drum winch is available in a range of capacities, and there's one design
- 此系列绞车是渔船锚泊系统的绝佳选择。
- 重型电机，高速，低噪音运行
- 材质是标准船用 316 不锈钢
- 安装该系列绞车，可以去任何您想去的地方捕鱼，只需要按下按钮，船锚
- 该系列绞车会以 80-90 英尺每分钟的速度收放船锚
- NYS 绞车有多种型号供您选择，每一种的容绳量都不同，总会有一种适合您的船

Standard Drum Winch 标准绞盘

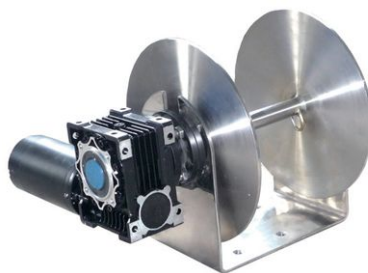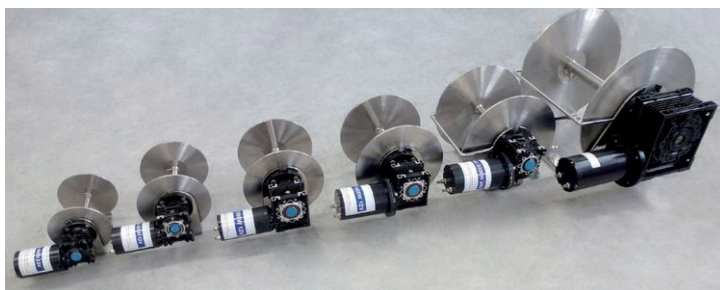


Features 特点

- The fully sealed gearbox is driven by a vertically mounted, permanent magnet motor
- Gearbox housings are marine grade alloy and drum is Stainless steel
- The speed of retrieval increases with each revolution.
- The rope and chain does not twist and tangle causing the unit to malfunction.
- The motor can be mounted at 30, 45 and 90 degrees to suit the configuration of the anchor well
- To protect the motor, the circuit breaker will trip out if there is a power overload (for example if the anchor is stuck on the bottom).
- Easily disassembled for servicing
- Fit include hand-switch and solenoid, circuit breaker
- 全封闭减速箱，立式安装，稀土电机
- 减速箱外壳材质是船用铝合金，此外卷筒标准不锈钢材质
- 设备出现故障时，绳子和链子也不会缠绕在一起或者打结
- 电机可以与水平面成 30 度，45 度或者 90 度安装，来适应不同的锚
- 如果电机过度负载（比如锚被卡在河床底部），继电器会断开来保护电机
- 拆装简单便于检修维护
- 配手动开关，换向器，断路开关

Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容绳量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDW-010	11kg	12V/24V	400W	50A/30A	70kg	320kg	6mm*70m	6mm*3m
YDW-011	16kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDW-012	24kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDW-013	30.5kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDW-014	42kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDW-015	115kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m



Dimension 尺寸图

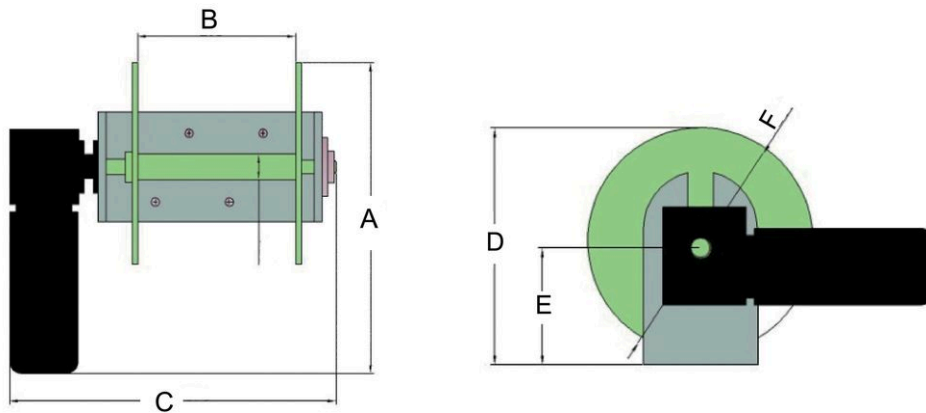

型号 Model	电机 Motor	A	B	C	D	E	F
YDW-010	400W	300	175	350	200	110	185
YDW-011	600W	335	206	376	265	140	245
YDW-012	1000W	410	208	393	310	165	290
YDW-013	1400W	450	230	423	350	180	340
YDW-014	1600W	520	260	500	420	215	400
YDW-015	2500W	705	433	722	570	295	550

NS Series Drum Winch NS 系列绞车


- The fully sealed gearbox is driven by a vertically mounted, permanent magnet motor
- Gearbox housings are marine grade alloy
- Except the gearbox, other parts of the winch are stainless steel, fully waterproof and rustproof.
- The motor can be mounted at 30,45 and 90 degrees to suit the configuration of the anchor well
- To protect the motor, the circuit breaker will trip out if there is a power overload (for example if the anchor is stuck on the bottom).
- Easily disassembled for servicing
- Fit include hand-switch, solenoid and circuit breaker
- 全封闭减速箱，立式安装，稀土电机
- 减速箱外壳材质是船用铝合金
- 除去减速箱和电机，其他部分材质均是不锈钢材质，加装电机不锈钢外壳，有极佳的防水防锈功能
- 电机可以与水平面成 30 度，45 度或者 90 度安装，来适应不同的锚
- 如果电机过度负载（比如锚被卡在河床底部），继电器会断开来保护电机
- 拆装简单便于检修维护
- 配手动开关，换向器，断路开关

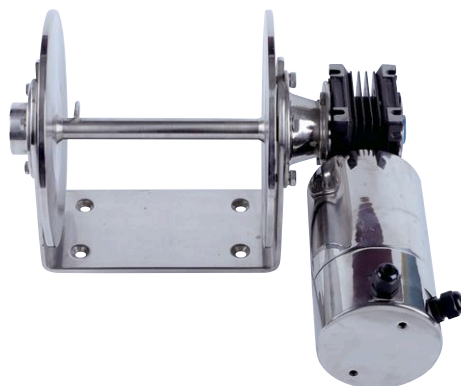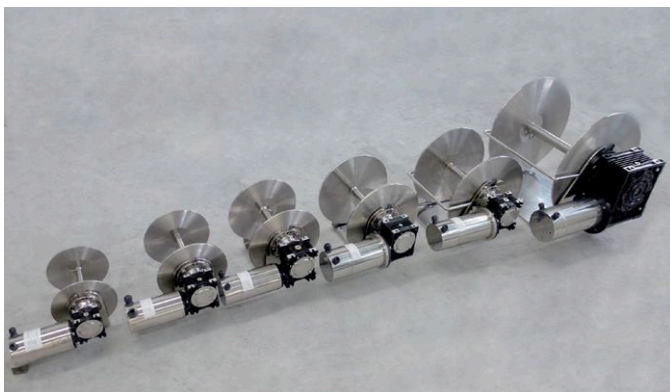

Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容绳量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDW-010S	12.5kg	12V/24V	400W	50A/30A	70kg	320kg	6mm*70m	6mm*3m
YDW-011S	18.5kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDW-012S	25.1kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDW-013S	32.5kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDW-014S	44.5kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDW-015S	119kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m

Dimension 尺寸图

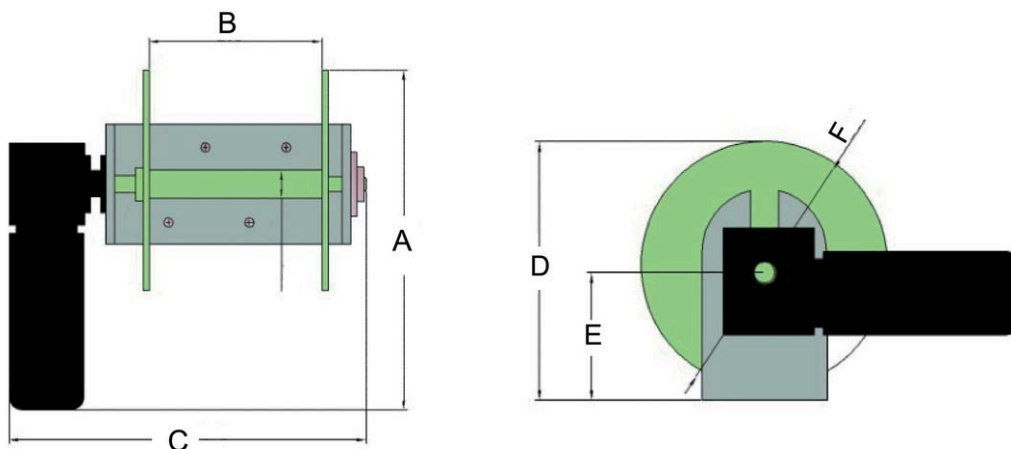

型号 Model	电机 Motor	A	B	C	D	E	F
YDW-010S	400W	320	175	350	200	110	185
YDW-011S	600W	370	206	376	265	140	245
YDW-012S	1000W	420	208	395	310	165	290
YDW-013S	1400W	480	248	450	350	180	340
YDW-014S	1600W	535	260	520	420	215	400
YDW-015S	2500W	740	433	750	570	295	550

ACCESSORIES 电控配件



HAND SWITCH
手动开关



SOLENOID
换向器



CIRCUIT BREAKER
断路开关

WS Series Drum Winch WS 系列绞车


- The fully sealed gearbox is driven by a vertically mounted, permanent magnet motor
- Gearbox housings are marine grade alloy
- Whole winch are stainless steel, fully waterproof and rustproof.
- The motor can be mounted at 30,45 and 90 degrees to suit the configuration of the anchor well
- To protect the motor, the circuit breaker will trip out if there is a power overload (for example if the anchor is stuck on the bottom).
- Easily disassembled for servicing
- Fit include hand-switch, solenoid and circuit breaker
- 全封闭减速箱，立式安装，稀土电机
- 减速箱外壳材质是船用铝合金
- 绞车整体全部不锈钢材质，完全防水防锈
- 电机可以与水平面成 30 度，45 度或者 90 度安装，来适应不同的锚
- 如果电机过度负载（比如锚被卡在河床底部），继电器会断开来保护电机
- 拆装简单便于检修维护
- 配手动开关，换向器，断路开关



Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容绳量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDWS-010S	11.7kg	12V/24V	400W	50A/30A	70kg	320kg	6mm*70m	6mm*3m
YDWS-011S	16kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDWS-012S	24kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDWS-013S	35kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDWS-014S	44kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDWS-015S	115kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m

Dimension 尺寸图

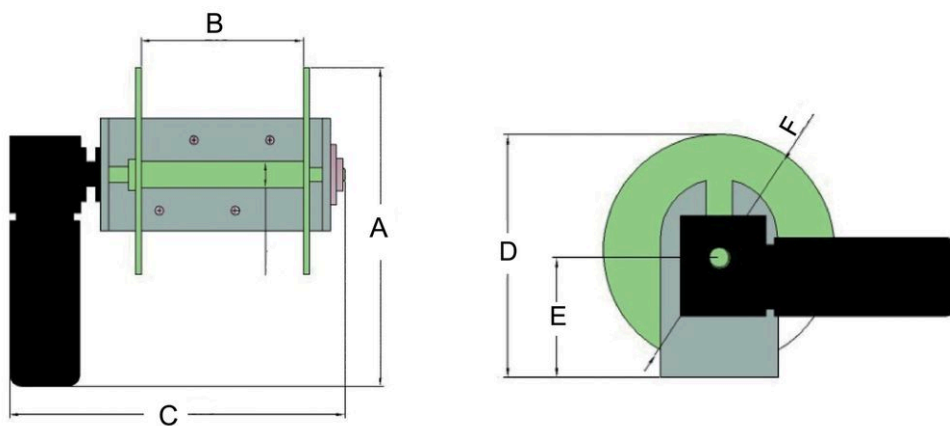

型号 Model	电机 Motor	A	B	C	D	E	F
YDWS-010S	400W	320	175	350	200	110	185
YDWS-011S	600W	370	206	376	265	140	245
YDWS-012S	1000W	420	208	395	310	165	290
YDWS-013S	1400W	480	248	450	350	180	340
YDWS-014S	1600W	535	260	520	420	215	400
YDWS-015S	2500W	740	433	750	570	295	550


Free Fall Series 手动离合电动绞车

- No need to tie off your rope at anchorage.
- The speed of retrieval increases with each revolution.
- All rope and chain is spooled on and off the drum at a rate of 80 and 90ft per minute
- The rope and chain does not twist and tangle causing the unit to malfunction.
- With the flick of a switch the anchor is raised and lowered.
- The NYS winch will freefall at up to 600 feet/minute which is a real advantage when you fish in depths greater than 20 meters. Also the drum can only free spool whilst there is weight pulling down so once the anchor hits the seabed the drum will automatically stop which totally eliminates the risk of an over run which happens when too much rope is spooled out when anchoring.
- 抛锚的时候无需把锚绳解下
- 每缠绕一圈，回收绳子的速度也会越来越快
- 绞车会以 80 和 90 英尺每分钟的速度收放锚绳和锚链
- 设备出现故障时，绳子和链子也不会缠绕在一起或者打结
- 只需要轻按开关轻松收放船锚
- 当您在水深超过 20 米的水域捕鱼时，离合绞车会以 600 英尺 / 每分钟的速度自由落体。绞车只有在负重情况下离合装置才会起作用，当锚接触河床绞车就会停止运转，所以抛锚的时候不会有太多多余的绳子脱开。



Other OPTIONS 其他配置选择


Whole 316 stainless steel free fall drum winch also available
整体不锈钢手动离合绞盘

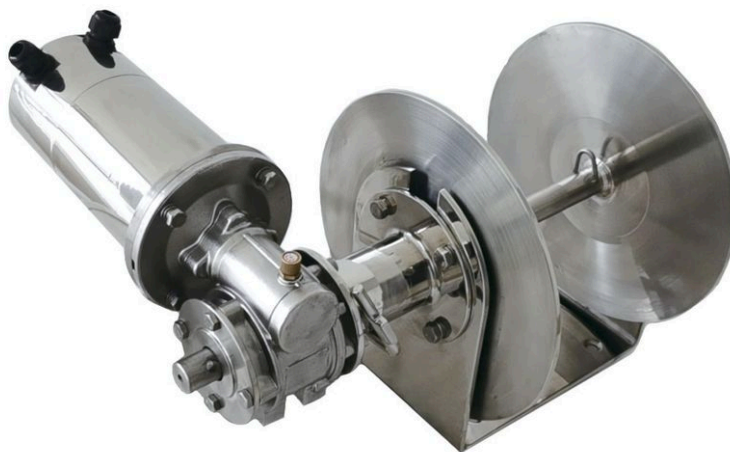

Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容绳量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDW-011F	17kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDW-012F	25kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDW-013F	36kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDW-014F	47kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDW-015F	120kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m

Dimension 尺寸图

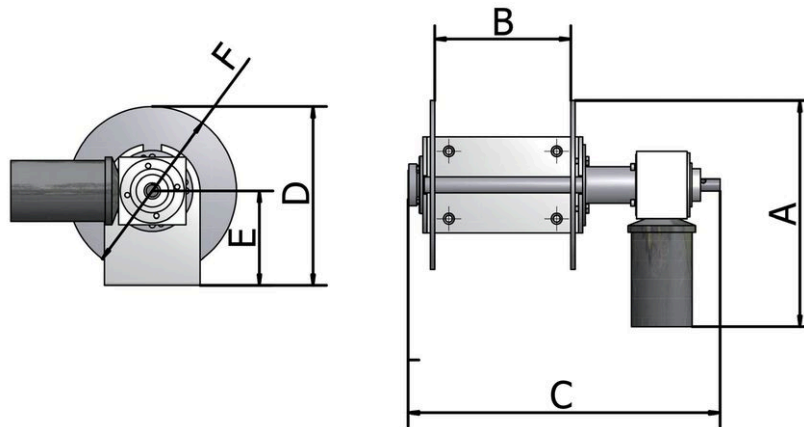

型号 Model	电机 Motor	A	B	C	D	E	F
YDW-011F	600W	370	206	435	265	140	245
YDW-012F	1000W	420	208	448	310	165	290
YDW-013F	1400W	480	248	478	350	180	340
YDW-014F	1600W	535	260	560	420	215	400
YDW-015F	2500W	740	433	770	570	295	550

Free Fall DS Series 电动离合电动绞车 DS 系列

- No need to tie off your rope at anchorage.
- The speed of retrieval increases with each revolution.
- All rope and chain is spooled on and off the drum at a rate of 80 and 90 ft per minute
- The rope and chain does not twist and tangle causing the unit to malfunction.
- Press the clutch switch, just loosen the clutch and the anchor will be free fall drop. Once you wish to raise the anchor, just power down the clutch switch and then press the winch clutch "UP" bottom.
- The NYS winch will freefall at up to 600 feet/minute which is a real advantage when you fish in depths greater than 20 meters. Also the drum can only free spool whilst there is weight pulling down so once the anchor hits the seabed the drum will automatically stop which totally eliminates the risk of an over run which happens when too much rope is spooled out when anchoring.
- 抛锚的时候无需把锚绳解下
- 每缠绕一圈，回收绳子的速度也会越来越快
- 绞车会以 80 和 90 英尺每分钟的速度收放锚绳和锚链
- 设备出现故障时，绳子和链子也不会缠绕在一起或者打结
- 当你想使用离合功能快速放锚的时候，只需要按下离合器开关，锚会快速自由落下完成抛锚工作。当你需要收锚时候，关掉离合开关，按下绞车“UP”按钮即可。
- 当您在水深超过 20 米的水域捕鱼时，离合绞车会以 600 英尺 / 每分钟的速度自由落体。绞车只有在负重情况下离合装置才会起作用，当锚接触河床绞车就会停止运转，所以抛锚的时候不会有太多多余的绳子脱开。



ACCESSORIES 电控配件



HAND SWITCH
手动开关



SOLENOID
换向器




CIRCUIT BREAKER
断路开关

Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容绳量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDW-011FS	23.5kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDW-012FS	31.5kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDW-013FS	38.5kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDW-014FS	51kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDW-015FS	133kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m

Dimension 尺寸图

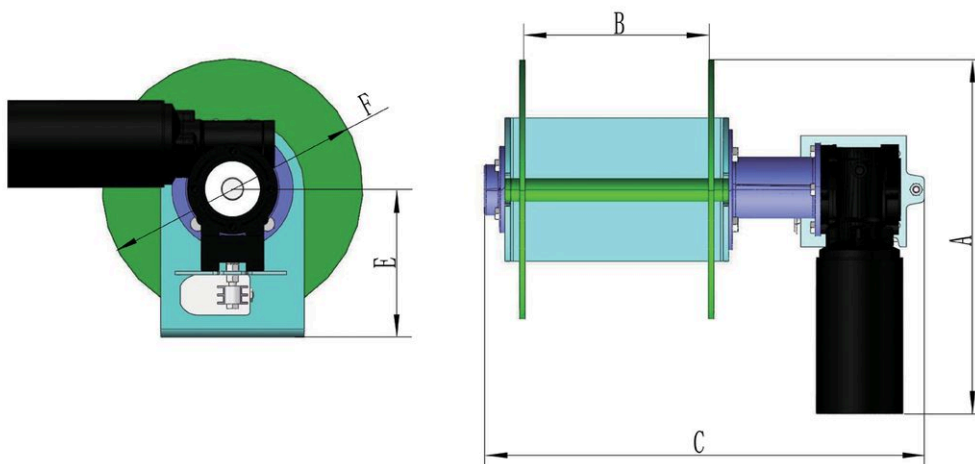

型号 Model	电机 Motor	A	B	C	D	E	F
YDW-011FS	600W	370	202	446	265	140	245
YDW-012FS	1000W	420	208	463	310	165	290
YDW-013FS	1400W	480	248	493	350	180	340
YDW-014FS	1600W	535	260	570	420	215	400
YDW-015FS	2500W	740	433	792	570	295	550


Tender Winch TW400 & TW600 绞盘

- This type winch are designed to recover a small tender and jet ski
- With heavy duty, waterproof motor and gear box
- high-class gear box can withstand the high stress
- Stainless steel drum ,base and shaft
- 这款绞盘专门为小型供应船和摩托艇设计
- 配置重型防水电机和减速箱
- 高质量的减速箱可以承受高强度的工作压力
- 不锈钢卷筒，底座和主轴



Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	速度 Speed	建议锚绳尺寸 Suggestion Rope Size
TW400	10kg	12V/24V	400W	50A/30A	70kg	320kg	20m/min	6~10mm
TW600	13kg	12V/24V	600W	70A/40A	90kg	510kg	20m/min	8~10mm

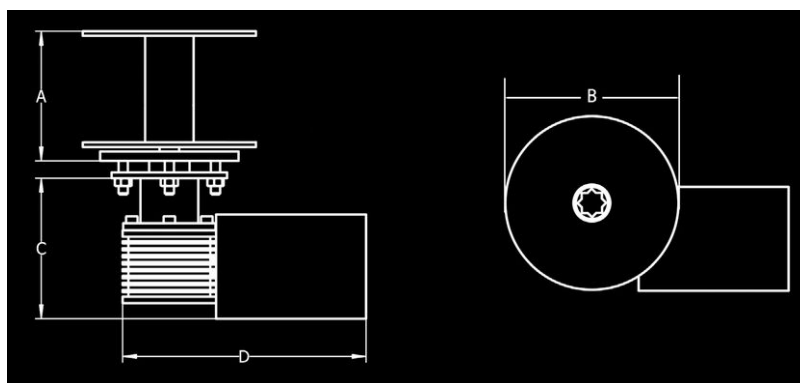

Dimension 尺寸图

型号 Model	电机 Motor	A(MM)	B(MM)	C(MM)	D(MM)
TW400	400W	120	150	125	230
TW600	600W	135	180	125	260


WINCH



- White or black ABS housing
- The parts inside are made of stainless steel or carbon steel.
- The drum can hold 5mm*50meters or 6mm*38 meters
- With clutch and can operated by hand switch
- Totally sealed motor and gearbox
- Simple deck mounted installation with no under deck parts, and the housing is removable.
- Fit hand switch and remote control

- 外壳为 ABS 材料
- 内部材料分不锈钢和碳钢两种材料
- 可以容纳 5mm 绳子 50 米 或者 6mm 绳子 38 米
- 带离合装置，可以用手动开关控制
- 全封闭式涡轮蜗杆减速箱
- 安装简单，没有需要安装在甲板以下的部件，外壳可拆卸。
- 使用时也可以不带外壳
- 配置手动开关，遥控

型号 Model	净重 N.W.	电源供电 Power Supply	电机 Motor	最大拉力 Max Pull	速度 Speed	容绳量 Rope Capacity
YDG-300	6Kg	12V	200W	50Kg	25m/min	6mm*38m/5mm*50m

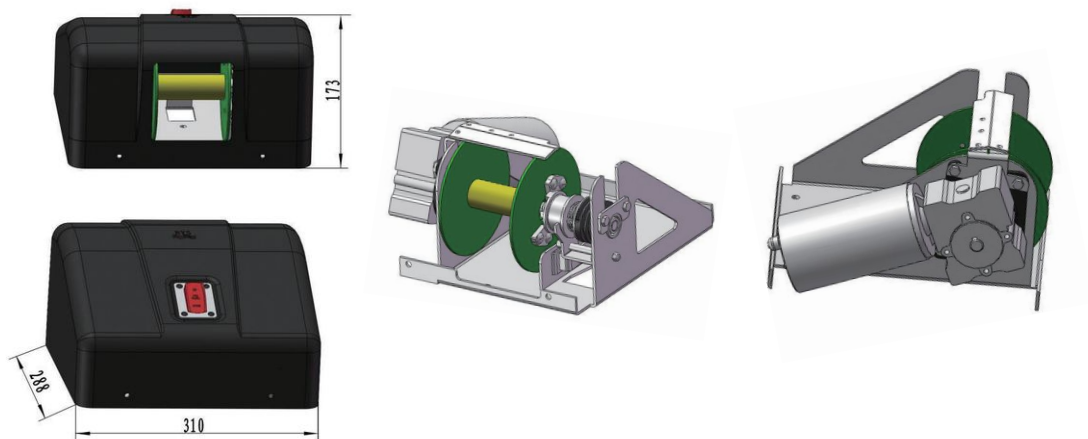

船用小型吊装机 Line hauler/Pot Puller



大扭矩 12V 或者 24V 直流电机驱动，该吊机可以在最小的助力下吊起 150Kg 的龙虾，鲈鱼或者螃蟹笼。高质量滑轮，全密封电机，整体不锈钢框架，可轻松折叠以便快速存放。因为它非常强大且易于使用，所以你可以单独去钓鱼，用容易的方式拖拽那些美味的甲壳类动物。绝对是您用来捕龙虾的理想选择。

This line hauler runs on 12V or 24V power with a lift capacity of 150KgS of lobster, prawn or crab traps, end weights, anchors. Runs quiet, stores easily. It's so powerful and easy to use, you can go fishing alone, you can haul loads of those scrumptious crustaceans easily.

ELECTRIC ACCESSORIES

电控配件

NYS CONTROL PANNEL



A



B

Easy to use, panel- mounted Up/ Down switch for windlass & winch operation, A type and B type option. Suitable for 12V/24V DC use.

使用简单，面板安装方式，A 和 B,2 种类型供您选择，适用于直流 12V/24 设备

NYS HAND SWITCH



An easily installed watertight handheld control. Completely maintenance free with one meter cable.

安装简单，防水手动开关，带 1 米线缆

NYS FOOT SWITCH



Perfect watertight and simple operation by your foot. UP & DOWN switch with a safety cover to prevent accidental push button operation. Control bottom made by sea water resistant rubber. Available in white and black.

水密，可以简单用脚轻轻踩踏来操作锚机 或者绞车正反转。操作按钮有保护盖，可以防止错误操作。操作按钮由海水防腐蚀的橡胶制造。开关有黑色和白色可供选择

NYS

SOLENOID



Solenoid is control device for DC 12V/24V motor, and can be used along with switches.

换向器适用于 12V/24V 直流电机，一般配合开关使用来控制锚机 / 绞车电机正反转

NYS

Remote Control



Remote control have two types, wired and wireless. With a wireless remote control installed, you will have full control of windlass anywhere on deck. The control consists of a transmitter and a receiver.

遥控开关有无线也有线两种，无限遥控器可以在甲板任何位置自由控制锚机，遥控器包含一个发送器一个信号接收器

NYS

Circuit Breaker




Protects the electric motor from overcharge and short circuit. It's available in different version, 50A, 80A, 100A, 120A, 150A, power supply DC 12V/24V

断路器可以在超载或者是短路的情况下断开电路，保护电机不被烧坏。有多个不同型号可供选择，从 50A 到 150A，适用于直流 12V/24V 电机。

NYS

Remote Control

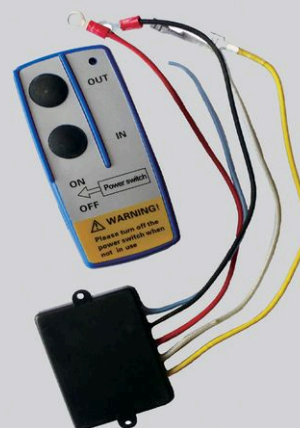

With a wireless remote control, you will have full control of windlass anywhere on deck. The control consists of a transmitter and a receiver.

遥控开关有无线也有线两种，无限遥控器可以在甲板任何位置自由控制锚机，遥控器包含一个发送器一个信号接收器

NYS

Control Box & Master Controller



This marine control box can control the starting braking, running, back running, change speed and protection of three-phase pole-change multi-speed motors for driving machines, such as windlasses, warping capstan and mooring winches with the cooperation of the marine master controller. The rated voltage of the Control Box & master controller is 380V or 440V. The protection grade is IP56.

Application:

1. Temperatures: -25°C — $+45^{\circ}\text{C}$
2. There are dewdrops, salt-dog and oil fog
3. There are shock and vibration periodical vibration: ± 22.5 transverse slope: ± 22.5

该系列船用控制箱与以下船用主令控制器配合使用于控制起锚机或起锚绞盘，系泊绞车等交流变频变速异步电机的启动，制动，正反转变速的同时保护电机。

该系列电控箱以及主令控制器适用于 380V/50HZ, 440V/60HZ 两种电制，防护等级 IP56

应用范围：

1. 环境温度： -25°C — $+45^{\circ}\text{C}$
2. 海上潮湿空气，油雾，盐雾
3. 承受船舶营运时的振动和冲击，倾斜摇摆均不大于 22.5



NYS

Control Switch



Application 应用范围：

1. Temperatures: -25°C — $+45^{\circ}\text{C}$
2. There are dewdrops, salt-dog and oil fog
3. There are shock and vibration periodical vibration: ± 22.5 transverse slope: ± 22.5

The rated voltage of the Control switch is 380V or 440V. The protection grade is IP56.

1. 环境温度 -25°C — $+45^{\circ}\text{C}$
2. 海上潮湿空气，油雾，盐雾
3. 承受船舶营运时的振动和冲击，倾斜摇摆均不大于 22.5

该系列手持按钮盒适用于 380V/50HZ, 440V/60HZ 两种电制，防护等级 IP56

Baittrap 鱼饵笼

The seal proof bait cage is made of stainless steel which protects your bait from seals and other predators. The lid can be opened for easy baiting and cleaning

密封防诱饵陷阱是由不锈钢制成的，可以保护你的诱饵不受海豹和其他捕食者的伤害。盖子可以打开，方便下饵和清洗。



Dimension 尺寸图

Model 型号	A(mm)	B(mm)
BT-001	160	280
BT-002	160	402

Rake 鱼耙

Dimension 尺寸图

Model 型号	A(mm)	B(mm)	C(mm)	D(mm)
RK-001	200	750	100	100
RK-002	200	750	100	100

Trim Tab Systems 压浪器

Haipu marine equipment Co.,Ltd produce a series of Trim Tabs kits.Haipu trim tabs designed to make your ship time more safer,smoother, with good durability and long service life. . Actuators are made of anti-corrosion,anti-aging nylon material. Tab plate and mounting hardware are made of 316 stainless steel .The Actuators are available in 12V and 24V DC.

海普生产一系列压浪器，我们的设计具有很好的耐用性和较长的使用寿命的同时，可以让您的航行更安全，平稳。

执行器外壳使用材料为耐老化，耐腐蚀的尼龙材质。压浪板以及安装五金使用 316 不锈钢材质。

执行器有直流 12V 和 24V 可以选择。





型号 Parts No.	长 * 宽 L"×W"(in)	船长 Boat Length (ft)	执行器数量 / 压浪板 Actuators per tab plate
TA-YD601	9" × 8"	12-16	1
TA-YD602	9" × 10"	14-18	1
TA-YD603	10" × 12"	16-25	1
TA-YD604	10" × 16"	20-30	1
TA-YD605	10" × 20"	26-40	2
TA-YD606	10" × 25"	30-50	2
TA-YD607	10" × 30"	35-60	2
TA-YD608	12" × 16"	25-35	2
TA-YD609	12" × 25"	30-42	2




LED Integrated Switch
LED 集成开关



Several mouting types for your options
多种安装样式供您选择

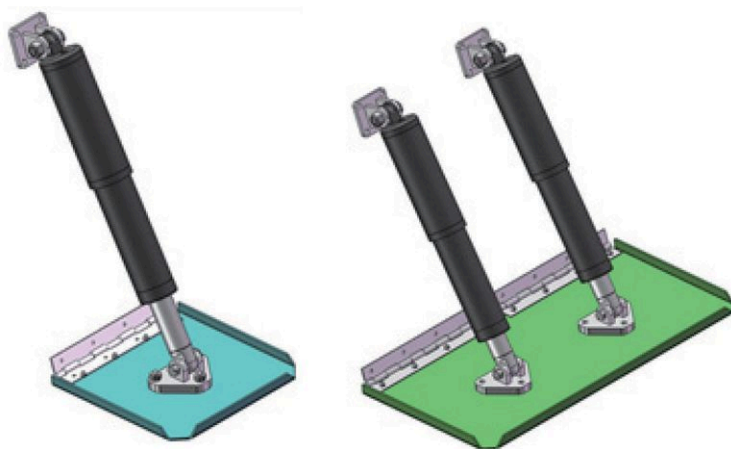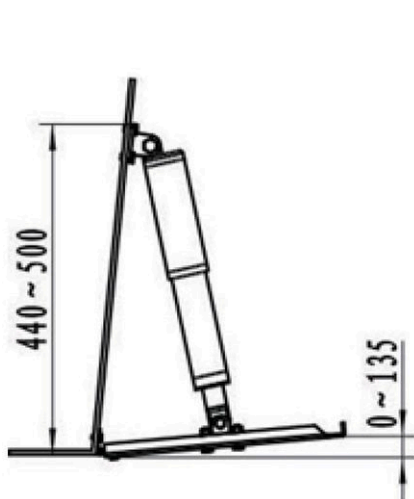

压浪板边缘安装型 Edge mount series

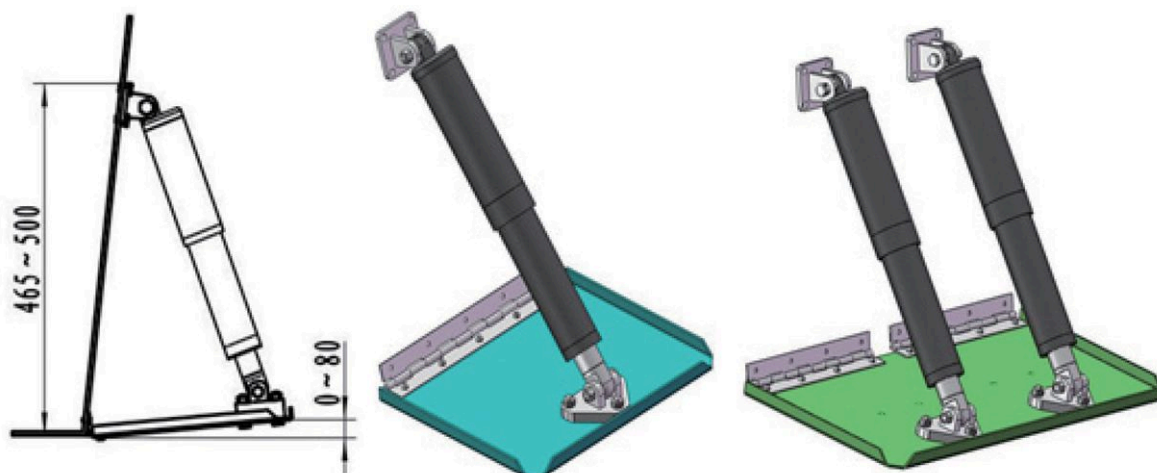

All the Tab plates and mounting hardware can customized according to your need.
所有压浪板以及安装五金都可以根据客户要求来定制

