

Mooring Bollard 国标带缆桩


GB/T554-2008

★ GB/T554-2008 mooring bollard have five different types: type A ordinary bollard, type B inserted bollard, type C simple bollard, type DL/DH double cross bollard. CB/T 3845-2013 mooring single cross bollard. The material is carbon steel or stainless steel. We can produce according to customer's requirement.

GB/T554-2008 国标带缆桩有五种不同的类型：A 型普通带缆桩，B 型嵌入带缆桩，C 型简易带缆桩，DL 型双十字螺栓式带缆桩 /DH 型双十字焊接式带缆桩。CB/T 3845-2013 船用十字形缆桩。

材质分为碳钢或者不锈钢，可以根据客户要求生产。

Type A A 型普通带缆桩

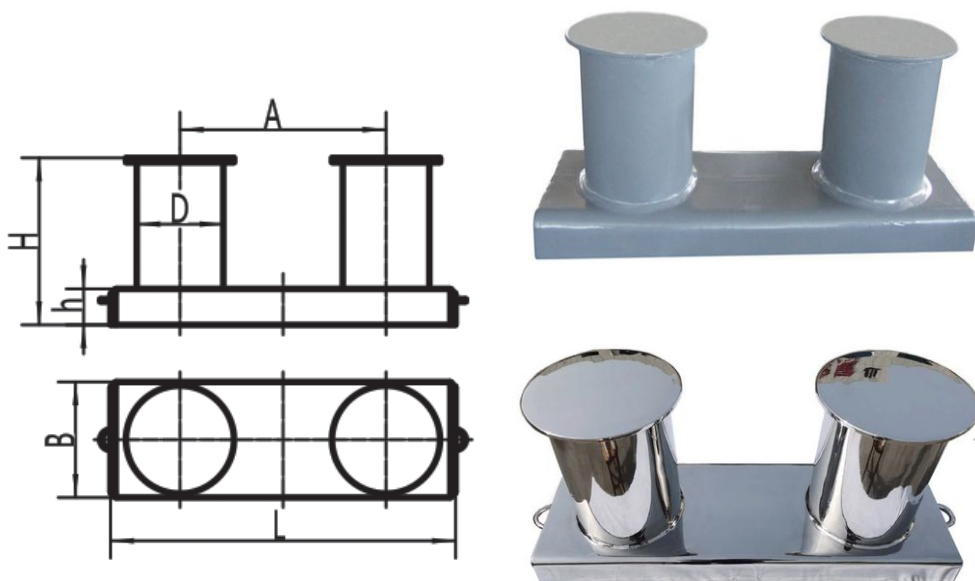


Dimension:mm

Model 型号	Nominal Dia. 公称直径 d mm	SWL(KN) 安全工作负荷	Pillar 桩柱			Base 底座			Weight 重量
			A	D	H	B	L	h≥	
A100	100	29	250	114	200	165	445	50	19
A125	125	39	315	140	250	195	540	60	29
A160	160	49	400	168	320	225	670	70	45
A200	200	78	500	219	385	290	860	85	80
A250	250	118	630	273	480	360	1065	100	141
A315	315	196	800	325	605	430	1300	125	264
A355	355	255	890	351	675	480	1475	145	358

Model 型号	Nominal Dia. 公称直径 d mm	SWL(KN) 安全工作负荷	Pillar 桩柱			Base 底座			Weight 重量
			A	D	H	B	L	h≥	
A400	400	314	1000	402	760	550	1630	160	499
A450	450	382	1130	450	850	620	1840	170	680
A500	500	451	1250	508	940	690	2040	190	911
A560	560	549	1380	560	1040	750	2240	210	1208
A630	630	686	1570	610	1165	820	2510	225	1601
A710	710	804	1750	712	1310	960	2840	260	2252
A800	800	981	2000	813	1495	1100	3240	295	3071


Type B B型嵌入式带缆桩

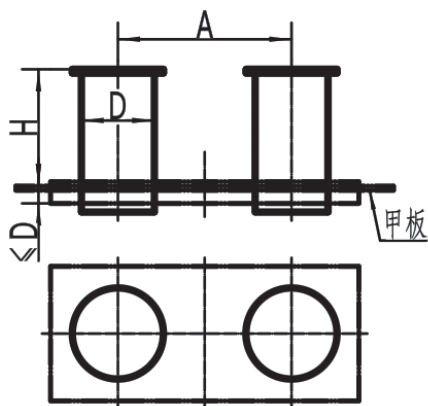

Model 型号	Nominal Dia. 公称直径	Max Breaking Load 安全工作负荷 (SWL)/kN	A	D	H	
					Deck without Plywood 不铺木甲板的甲板	Deck with Plywood 铺木甲板的甲板
B160	160	49	400	168	250	310
B200	200	78	500	219	300	360
B250	250	118	630	273	380	440
B315	315	196	800	325	480	540
B355	355	255	890	351	530	590
B400	400	314	1000	402	600	660
B450	450	382	1130	450	680	740
B500	500	451	1250	500	750	810


Type C C 型简易带缆桩

Dimension:mm



Model 型号	Nominal Dia. 公称直径	安全工作负荷 (SWL)/kN	A	B	D	H	h	L	Weight 重量 kg
C50	50	13	180	100	50	115	9	310	4.5
C75	75	18	275	125	75	170	12	430	10.8
C100	100	25	350	160	100	220	14	540	18.6
C125	125	34	430	200	125	275	15	676	34.3
C150	150	43	500	230	150	330	16	800	49


Type DL/DH DL 型双十字螺栓式带缆桩 /DH 型双十字焊接式带缆桩

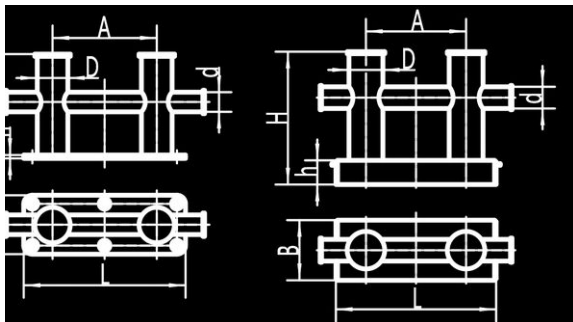

Model 型号	Nominal Dia. 公称直径	安全工作负荷 (SWL)/kN	A	B	D	d	H	h	L	Screws 螺钉		Weight 重量 kg
										Screw Thread Dia. 螺纹直径	Quantity 数量 (个)	
DL/DH50	50	13								M12	6	7
DL/DH75	75	18	275	170	75	48	290	10	450	M16		16
DL/DH100	100	25	350	200	100	65	350	12	550	M18		27

Model 型号	Nominal Dia. 公称直径	安全工作负荷 (SWL)/kN	A	B	D	d	H	h	L	Screws 螺钉		Weight 重量 kg
										Screw Thread Dia. 螺纹直径	Quantity 数 量 (个)	
DL/DH125	125	34	425	240	125	80	425	14	660	M22		49
DL/DH150	150	43	500	270	150	90	500	16	770			71
DL/DH175	175	62	530	320	180	110	550	18	850	M24		103
DL/DH200	200	72	600	360	203	130	795	145	960	—	—	181
DL/DH250	250	105	750	450	245	159	855	155	1200			310
DL/DH300	300	185	900	540	299	194	1160	180	1440			576

CB/T 3845-2013 船用十字型缆桩

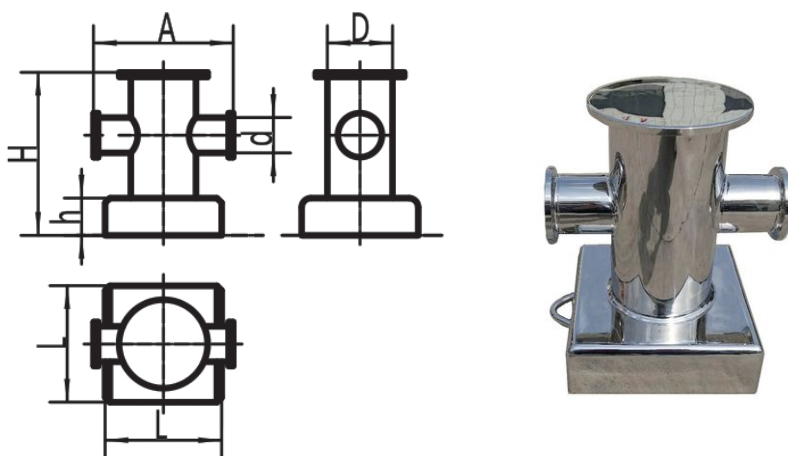

Model 型号	Nominal Dia. 公称直径	安全工作负荷 (SWL)/kN	A	D	d	H	h	L	Weight 重量 kg
D100	100	50	240	114	60	285	75	200	19
D125	125	80	300	140	76	350	80	250	31
D150	150	100	360	168	89	430	90	315	47
D200	200	150	460	219	114	520	100	400	78
D250	250	250	580	273	140	645	125	500	134
D300	300	400	725	325	168	810	150	630	267
D350	350	500	850	355	—	970	170	700	360
D400	400	650	950	406	219	995	175	800	503