


ANCHORING

With over 15 years experience in producing anchors, New Young Star have developed a full range of anchoring accessories. Each range is available in different size to suit boats from 4 meters to 80 meters.

Available in hot dipped galvanized and high polished stainless steel AISI 316.

新营大金属制品有限公司已经有超过15年生产船锚的经验，研发了多种锚型。每一种锚型有多种规格可供选择，可以配套长度4米到80米的各种船型。

除316不锈钢材质外，您还可以选择碳钢热镀锌材质
其中许多锚型都可以做400kg 以下的任何规格重量

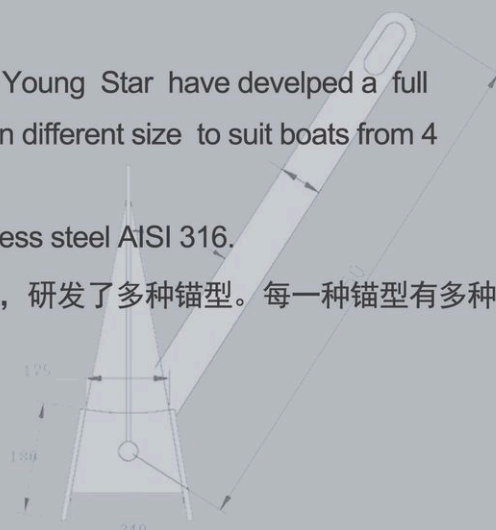

Delta Anchor 劳伦斯锚


The high-grade 316 stainless steel used in the construction of the Delta anchor gives it maximum tensile strength. The low centre of gravity and self-righting geometry ensure that the Delta anchor will set immediately. Available in hot dipped galvanized and in high polished stainless steel AISI 316

★ This type anchor can customized less than 250kg.

劳伦斯锚材质为高质量 316 不锈钢材质，有很强的拉伸强度。重心比较低，同时可以自动扶正的几何外形，使得劳伦斯锚可以快速安置。除 316 不锈钢材质外，您还可以选择碳钢热镀锌材质

★该款锚型可以做 250kg 以下的任何重量规格

Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	Weight (kg) 重量	L(mm)	H(mm)	W(mm)
YDT-005S	YDT-005C	5	555	250	220
YDT-007S	YDT-007C	7.5	625	300	270
YDT-010S	YDT-010C	10	665	310	300
YDT-015S	YDT-015C	15	755	350	330
YDT-020S	YDT-020C	20	830	370	390
YDT-030S	YDT-030C	30	970	400	450
YDT-040S	YDT-040C	40	1100	430	490
YDT-050S	YDT-050C	50	1175	450	520
YDT-063S	YDT-063C	63	1270	520	565
YDT-080S	YDT-080C	80	1350	600	605
YDT-100S	YDT-100C	100	1500	750	700

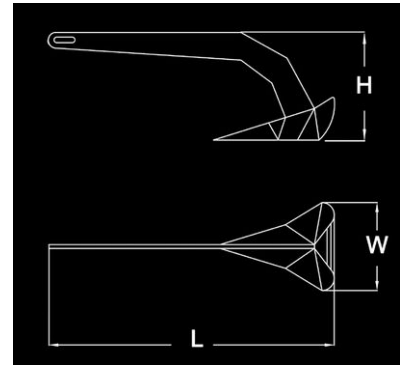


Bruce Anchor 布鲁斯锚

Sets fast and secure to almost any bottom conditions. Cast in a single piece. Available in hot dipped galvanized steel and stainless steel AISI 316

安置速度快，适用于各种河床底面一体铸造成型，材质有碳钢热镀锌和 316 不锈钢两种

Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	Weight (kg) 重量	L(mm)	H(mm)	W(mm)
YDB-005S	YDB-005C	5	460	305	260
YDB-007S	YDB-007C	7.5	535	350	305
YDB-010S	YDB-010C	10	585	390	340
YDB-015S	YDB-015C	15	665	440	410
YDB-020S	YDB-020C	20	730	500	420
YDB-030S	YDB-030C	30	826	525	450
YDB-035S	YDB-035C	35	920	480	560
YDB-040S	YDB-040C	40	890	480	620
YDB-050S	YDB-050C	50	1010	500	690
YDB-080S	YDB-080C	80	1080	548	700
YDB-100S	YDB-100C	100	1135	560	770

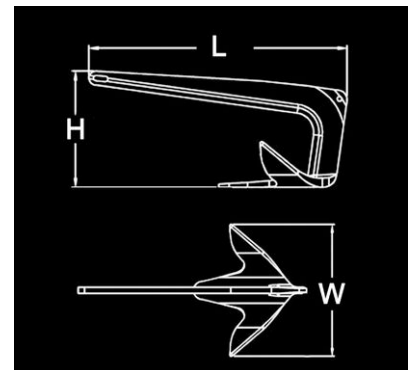

Danforth Anchor 丹佛斯锚

Offer proven holding power and is designed to penetrate sand, mud and grassy bottoms.

Arc welded, the over sides flukes pivot downward into the bottom to set fast.

Available in hot dipped galvanized steel and stainless steel AISI 316.

★ This type anchor can customized less than 400kg.



抓力大是丹佛斯锚的一大特点，适合各种河床底面，比如沙底，泥底，甚至草底。

电弧焊接工艺，锚爪可以随轴转动，可以快速插入河床底部。

除 316 不锈钢材质外，您还可以选择碳钢热镀锌材质。

★该款锚型可以做 400kg 以下的任何重量规格。

Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	Weight 重量 (kg)	L(mm)	H(mm)	W(mm)
YDF-002S	YDF-002C	5	440	650	155
YDF-003S	YDF-003C	7.5	550	690	160
YDF-005S	YDF-005C	10	600	740	190
YDF-012S	YDF-012C	12	650	765	210
YDF-015S	YDF-015C	15	700	880	215
YDF-016S	YDF-016C	20	740	920	230
YDF-027S	YDF-027C	30	830	1050	270
YDF-034S	YDF-034C	40	890	1100	290
YDF-050S	YDF-050C	50	910	1150	300
YDF-075S	YDF-075C	75	1000	1300	320
YDF-100S	YDF-100C	100	1100	1400	350



Folding Anchor 折叠锚


Folding anchor is ideal for small boats or inflatable boats. This anchor is easy to fold out and unfold and stow away.

★ Available in hot dipped galvanized steel and 316 stainless steel

折叠锚适合小船和气垫船。该锚易折叠和收锚。

★除 316 不锈钢材质外，您还可以选择碳钢热镀锌材质。

Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	Weight 重量 (kg)	A(mm)	B(mm)	C(mm)
YDFL-000S	/	0.7	200	90	47
YDFL-001S	YDFL-001C	1.5	305	135	54
YDFL-002S	YDFL-002C	2.5	360	156	59
YDFL-003S	YDFL-003C	3.2	420	174	73
YDFL-005S	YDFL-005C	5	470	210	80
YDFL-006S	YDFL-006C	6	545	222	85
YDFL-008S	YDFL-008C	8	585	240	90
YDFL-010S	YDFL-010C	0	650	260	102
/	YDFL-012C	12	840	326	102

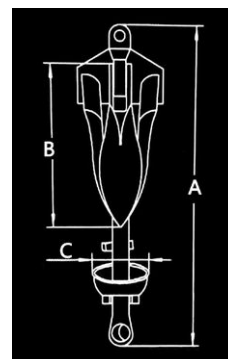

Plow Anchor 犁锚

Plow anchor is a high holding power anchor. The hinged shank delivers consistent setting and holding even in the very worst conditions,

Available in hot dipped galvanized steel and stainless steel AISI 316.

★ This type anchor can customized less than 250kg.


犁锚抓力大，锚柄与锚头以铰链连接，即使在恶劣条件也可以抓住河底。

除 316 不锈钢材质外，您还可以选择碳钢热镀锌材质。

★ 该款锚型可以做 250kg 以下的任何重量规格。



Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	Weight 重量 (kg)	A(mm)	B(mm)	C(mm)	D(mm)
YDP-005S	YDP-005C	5	510	340	260	220
YDP-007S	YDP-007C	7	560	380	270	230
YDP-009S	YDP-009C	9	600	375	280	250
YDP-012S	YDP-012C	12	660	430	340	300
YDP-016S	YDP-015C	16	730	490	370	330
YDP-022S	YDP-022C	22	700	550	360	360
YDP-027S	YDP-027C	27	780	600	460	390
YDP-034S	YDP-035C	34/35	860	710	550	440
YDP-050S	YDP-050C	50	950	740	540	470
YDP-080S	YDP-080C	80	1150	790	570	500
YDP-100S	YDP-100C	100	1500	800	700	660

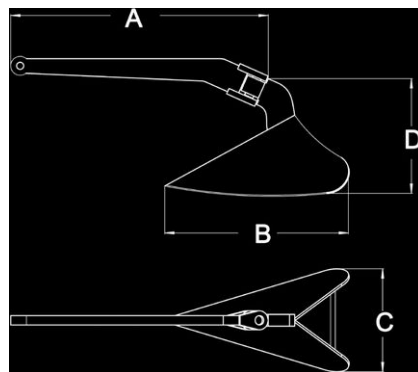

Wing Anchor 三角锚

Wing anchors are exceptionally effective in a variety of sea beds.

Work very well with NYS bow rollers. Remains stable in various tidal conditions.

Available in hot dipped galvanized and in high polished stainless steel AISI 316.

★ This type anchor can customized less than 250kg.



三角锚适合各种河床，可以和 NYS 锚支架配合使用。在各种条件下，抛锚时都比较稳定。

除 316 不锈钢材质外，您还可以选择碳钢热镀锌材质。

★ 该款锚型可以做 250kg 以下的任何重量规格。



Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	Weight 重量 (kg)	L(mm)	H(mm)	W(mm)
YDD-005S	YDD-005C	5	560	245	205
YDD-007S	YDD-007C	7.5	625	250	240
YDD-010S	YDD-010C	10	660	280	280
YDD-015S	YDD-015C	15	730	310	315
YDD-020S	YDD-020C	20	870	390	350
YDD-030S	YDD-030C	30	980	420	370
YDD-050S	YDD-050C	50	1210	610	490
YDD-075S	YDD-075C	75	1400	800	600
YDD-100S	YDD-100C	100	1500	900	700

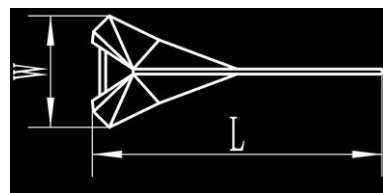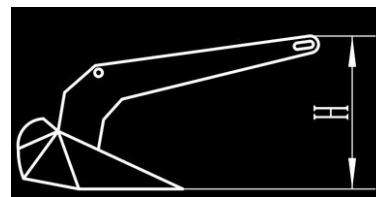



Shovel Anchor 沙沃尔锚

Shovel anchors available in hot dipped galvanized and in high polished stainless steel AISI 316.

沙沃尔锚除了 316 不锈钢材质外，您还可以选择碳钢热镀锌材质





Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	重量 weight (kg)	W(mm)	L(mm)	H(mm)
YDS-006S	YDS-006C	6	550	270	340
YDS-007S	YDS-007C	7.5	585	300	360
YDS-010S	YDS-010C	10	630	335	400
YDS-015S	YDS-015C	15	690	370	435
YDS-020S	YDS-020C	20	760	395	470
YDS-030S	YDS-030C	30	880	410	495



Slip Ring Anchor 滑环锚

Galvanized Part No 热镀锌型号	Weight 重量 (LB)	W(mm)	H(mm)	E(mm)
YDV005C	5LB	380	425	100
YDV007C	7LB	415	450	115
YDV010C	10LB	455	490	130
YDV012C	12LB	485	520	145
YDV014C	14LB	515	545	160
YDV015C	16LB	530	572	180
YDV018C	18LB	575	610	200
YDV024C	24LB	710	810	240



Stock Anchor 双臂锚

Stainless steel Part No 型号	Weight 重量 (kg)	Length(mm)	Width(mm)
Y9805C	5	580	340
Y9810C	10	745	520
Y9812C	12	790	530
Y9815C	15	815	570
Y9820C	20	870	630
Y9825C	25	902	690
Y9835C	35	1020	800




Grapnel Anchor 五爪锚

Grapnel anchors available in hot dipped galvanized and stainless steel 316.

五爪锚除了 316 不锈钢材质外，您还可以选择碳钢热镀锌材质

Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	Weight 重量 (kg)	A(mm)	B(mm)	C(mm)	D(mm)
YDL-002S	YDL-002C	2kg	530	185	80	16
YDL-003S	YDL-003C	3kg	600	210	80	16
YDL-004S	YDL-004C	4kg	640	235	90	16
YDL-006S	YDL-006C	6kg	650	250	90	16
YDL-008S	YDL-008C	8kg	710	265	90	16

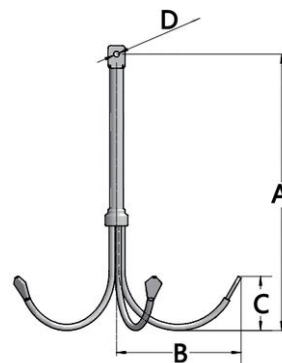

Pool Anchor

CB/T 3221-2008 N 型波尔锚

Pool anchor is a high holding power anchor. The hinged shank delivers consistent setting and holding even in the very worst conditions, whatever the changes in wind and current. Available in hot dipped galvanized & painted steel and stainless steel AISI 316.

★ This type stainless steel anchor can customized less than 500kg

★ Certification: LR, BV, DNV-GL, CCS, etc.




波尔锚是一种大抓力锚型, 锚柄与锚头以铰链连接, 即使在大风或者浪大的恶劣条件也可以抓住河底。

除 316 不锈钢材质外, 您还可以选择碳钢材质表面热镀锌或者表面刷漆。

★ 该款不锈钢锚型可以做 500kg 以下的任何重量规格, 碳钢材质的波尔锚可以提供 LR, BV, DNV-GL, CCS 等各大船级社证

Stainless steel Part No 不锈钢型号	Steel Part No 碳钢型号	Weight 重量 (kg)	H(mm)	H1(mm)	H2(mm)	L(mm)	L1(mm)	L2(mm)
YDL-012S	YDL-012C	12	385	250	65	325	275	155
YDL-020S	YDL-020C	20	455	300	75	385	325	185
YDL-040S	YDL-040C	40	570	370	95	480	410	235
YDL-060S	YDL-060C	60	655	425	110	555	470	270
YDL-080S	YDL-080C	80	720	470	120	610	515	295
YDL-100S	YDL-100C	100	775	505	130	655	555	320
YDL-120S	YDL-120C	120	825	540	135	700	595	340
YDL-135S	YDL-135C	135	856	562	139	723	614	342
YDL-180S	YDL-180C	180	943	618	153	796	676	377
YDL-160S	YDL-160C	225	1015	666	165	858	729	406
YDL-270S	YDL-270C	270	1079	708	75	911	774	431
YDL-315S	YDL-315C	315	1136	745	184	959	815	454
YDL-360S	YDL-360C	360	1188	779	193	1003	852	475
YDL-430S	YDL-430C	430	1260	826	204	1064	904	504
YDL-495S	YDL-495C	495	1321	866	214	1115	948	528
	YDL-585C	585	1396	916	226	1179	1002	558
	YDL-675C	675	1464	960	237	1237	1051	585
	YDL-765C	765	1527	1001	248	1290	1096	610
	YDL-855C	855	1584	1039	257	1338	1137	633
	YDL-970C	970	1653	1084	268	1396	1186	660
	YDL-1080C	1080	1713	1123	278	1447	1229	684
	YDL-1195C	1195	1772	1162	287	1496	1271	708
	YDL-1305C	1305	1824	1196	296	1541	1309	729
	YDL-1440C	1440	1885	1236	306	1592	1353	753
	YDL-1575C	1575	1942	1274	315	1641	1394	776

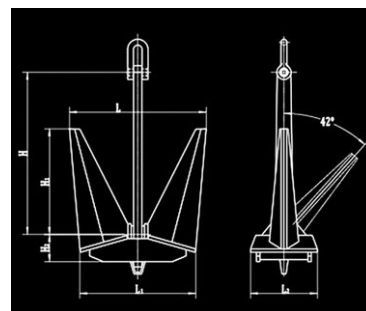

Navy Anchor 海军锚

GB/T 545-1996

Navy anchor has a simple structure, shank and fluke is a body cast.

The fluke is fixed, not turning. Navy anchors are more suitable to be used as bow anchors for merchant ships. They can be used as stern anchors and spare anchors.

Most of them are used for small boats, sailing ships and fishing boats.

More commonly used in the boat and sailing. The maximum of holding power to weight ratio can reach 12.


★ Certification: LR, CCS/NK/LR/ABS/BV/DNV etc.

海军锚结构简单，锚杆和锚爪是铸造的。锚杆是固定的，不能来回活动。常用于船上。海军锚比较适合做商船首锚使用，可做尾锚，备用锚，多数用于小船，帆船，渔船。最大抓重比可达到 12。

★可以提供提供 CCS/NK/LR/ABS/BV/DNV 等各大船级社证书



Part No 型号	Weight 名义重量 (kg)	B1(mm)	B(mm)	H(mm)	L(mm)
N-10	10	445	105	136	530
N-15	15	490	120	155	615
N-20	20	520	135	170	685
N-30	30	565	155	192	785
N-50	50	635	185	230	960
N-75	75	710	210	266	1105
N-100	100	780	230	293	1215
N-115	125	840	245	316	1310
N-150	150	900	265	336	1395
N-200	200	990	290	370	1535
N-250	250	1065	310	398	1650
N-300	300	1105	330	423	1755
N-400	400	1240	365	465	1930
N-500	500	1335	390	502	2080
N-600	600	1440	415	533	2210
N-700	700	1500	440	560	2330
N-800	800	1570	460	587	2435
N-1000	1000	1685	495	633	2620
N-1250	1250	1810	535	680	2825
N-1500	1500	1955	565	725	3000

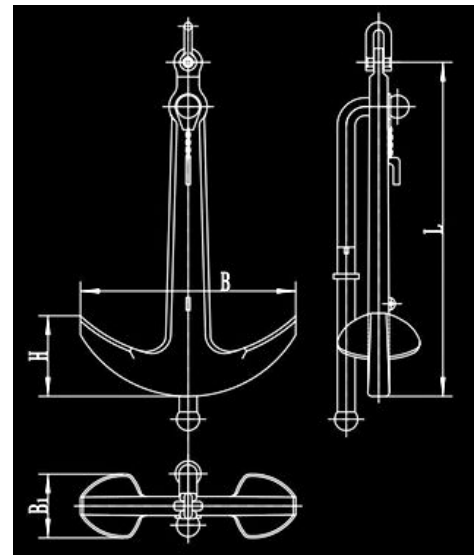

Hall Type Anchor 霍尔锚

GB/T 546-2016


Hall anchor is also called mountain anchor, is a typical type of a Stockless Bow Anchor. It can rotate freely and form a certain angle with the anchor rod. Its grip is about 2.5-4 times the anchor weight. The Hall anchor widely used in commercial shipping industry. The traditional design makes a stable working performance.

The traditional design makes a stable working performance.


★ Certification: LR, CCS/NK/LR/ABS/BV/DNV etc.

霍尔锚也称为山锚, 它是一种无杆锚, 可以自由旋转并与锚杆形成一定角度。它的抓地力约为锚固重量的 2.5-4 倍, 霍尔锚多用于商用工业运输船, 传统的设计, 工作性能稳定。


★该锚型可以提供 CCS/NK/LR/ABS/BV/DNV 等各大船级社证书

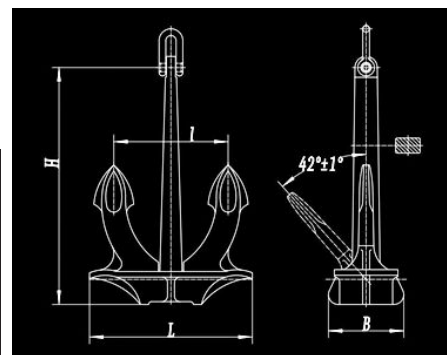

A type 矩形杆

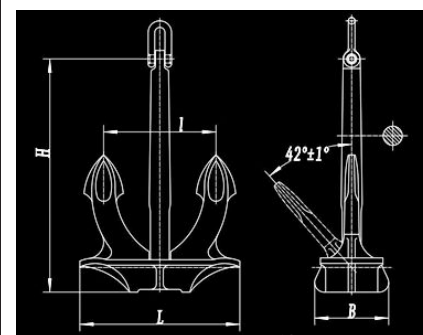

B type 圆形杆

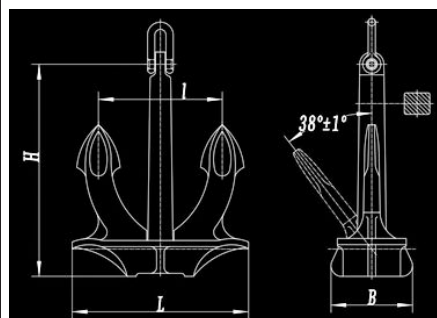

C type 矩形短杆

Part No 型号	Weight 名义重量 (kg)	H(mm)			B(mm)	L(mm)	I(mm)
		A 型	B 型	C 型			
H-40	40	624	624	497	198	430	303
H-60	60	713	713	568	227	492	347
H-100	100	850	850	680	270	584	410
H-125	125	911	911	726	443	629	443
H-150	150	969	969	768	308	670	470
H-180	180	1029	1029	820	327	710	500
H-240	240	1140	1140	909	361	784	552
H-300	300	1225	1225	980	388	844	595
H-360	360	1298	1298	1036	412	898	630
H-420	420	1367	1367	1091	434	946	660
H-480	480	1434	1434	1138	454	988	690
H-570	570	1517	1517	1203	481	1042	732
H-660	660	1591	1591	1262	506	1096	769
H-780	780	1684	1684	1337	535	1160	813
H-900	900	1768	1768	1403	560	1220	855
H-1020	1020	1840	1840	1463	584	1268	891
H-1140	1140	1908	1908	1519	605	1319	926
H-1290	1290	1989	1989	1589	630	1374	965